
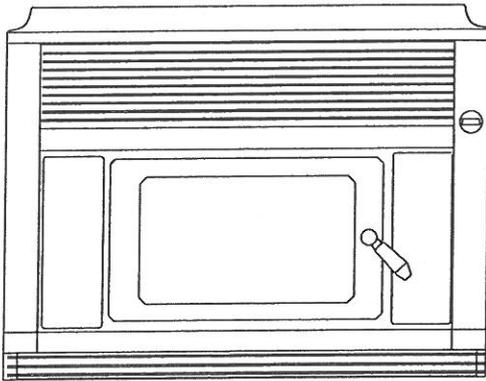
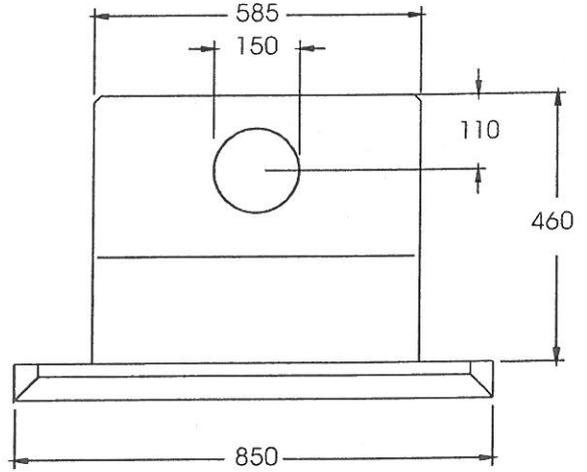


INSERT SPECIFICATIONS

MODEL: INSERT IB08

PAGE 1 OF 2

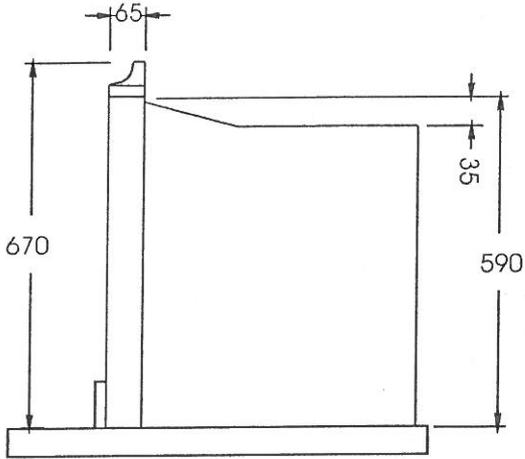

NZHHA Tested
Maximum
Output (KW)

Industry Rated
Peak Output (KW)

Max Log
Length

Water Heating
Option

Estimated Burn
Time on low (HRS)

11.9

17

425



8-10

TESTED AND APPROVED TO THE FOLLOWING STANDARDS


NZS 7421

INSERT SPECIFICATIONS

MODEL: INSERT IB08

PAGE 2 OF 2

Typical installation shown complies with NZS7421 (including appendix J). The insulating blanket supplied should be installed with all units to ensure maximum performance.

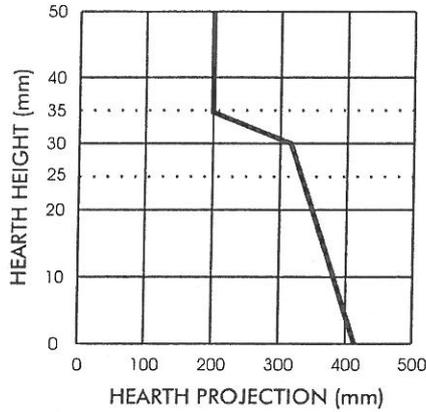

Hearth Requirements

As per graph (Insulating Hearth)
Dimensions are taken from door seal lip (Fire Box) to the front of the hearth.

Notes: Flue Kits (All Models)

Please follow the flue manufacturers installation instructions. The tested flue height for this unit is 4.2 metres. Deviation from this may alter the heaters performance and may nullify the Reliance Group warranty if the flue is excessively long or short. If in doubt contact your Jayline supplier.

(Seismic Restraint)

Drill through the bottom tray of the cabinet into the masonry and fit two M6 bolts or similar \varnothing as a seismic restraint.

IF THE MANTEL EXTENDS BEYOND THIS LINE A MANTEL PROTECTOR SHOULD BE FITTED

Water Booster

Use only a Reliance Group Water Booster 2.0 Kw (tested to NZHHA Max output) part# 123699. Any other Water Booster will nullify the Reliance Group Warranty.

