

- A = Rear wall to top of top plate
- B = Side wall to side edge of top plate
- C = Door seal lip (fire box) to the front of the floor protector
- E = Wall to rear corner of top plate

All dimensions are in millimetres.  
All dimensions are set as a minimum guide only.

Minimum clearance requirements to combustibles with 1200mm Jayline MKII double skin flue shield


A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
200	340	300	89	120	356	705	488	900	926	1259	1070	569	625	730	509

Water Heating Option	Floor Protector	Emissions	Efficiency
No	Non insulated	1.37g/kg	66.4%

THIS MODEL HAS BEEN TESTED TO AS/NZS 2918:2001 AND IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001 including Appendix F. The minimum clearance to combustibles may be reduced if the combustibles are shielded with an approved non-combustible material. Details of suitable shielding materials and appropriate clearance reduction factors are present in Section 3 of AS/NZS 2918:2001.

Clean Air Authorisation #N0025

RETAIL LINKS LTD RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE.

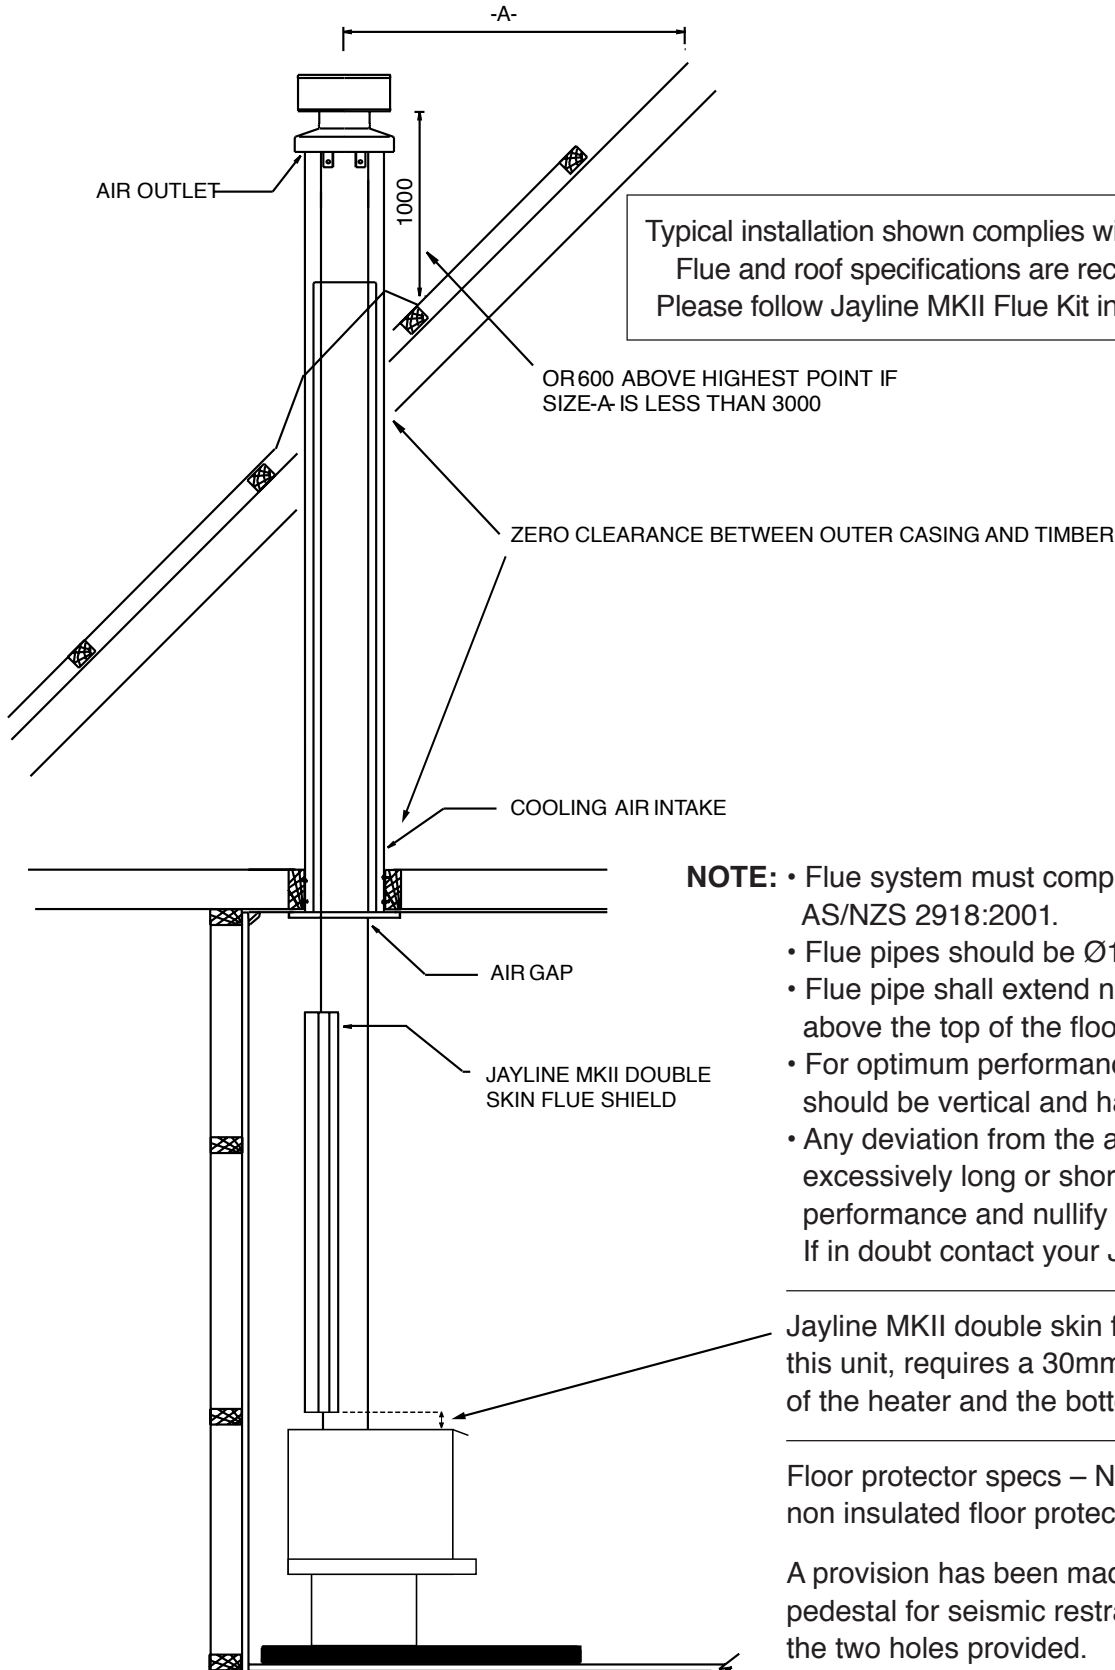

Typical installation shown complies with AS/NZS 2918:2001. Flue and roof specifications are recommendations only. Please follow Jayline MKII Flue Kit installation instructions.

- NOTE:**
- Flue system must comply with Appendix F of AS/NZS 2918:2001.
  - Flue pipes should be  $\text{Ø}150\text{mm}$  ( $\text{Ø}6''$ ).
  - Flue pipe shall extend no less than 4600mm above the top of the floor protector.
  - For optimum performance the flue system should be vertical and have no bends.
  - Any deviation from the above (eg: if the flue is excessively long or short) may alter the heaters performance and nullify the Jayline warranty. If in doubt contact your Jayline supplier.

Jayline MKII double skin flue shield, tested on this unit, requires a 30mm gap between the top of the heater and the bottom of the shield

Floor protector specs – New Zealand minimum non insulated floor protector only.

A provision has been made at the rear of the pedestal for seismic restraint by bolting through the two holes provided.

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001 including Appendix F.