

- A = Rear wall to rear heat shield
- B = Side wall to side edge of top plate
- C = Door seal lip (firebox) to the front of the floor protector
- D = Door seal lip (firebox) to the side of the floor protector
- E = Wall to rear corner of top plate
- R = Rear to lower edge of door

All dimensions are in millimetres.  
All dimensions are set as a minimum guide only.

Minimum clearance requirements to combustibles with 1200mm Jayline MKII double skin flue shield


A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
100	250	300	200	50	257	574	392	900	826	1122	985	570	706	647	444

Water Heating Option	Floor Protector	Emissions	Efficiency
No	Non insulated	1.34g/kg	69.6%

THIS MODEL HAS BEEN TESTED TO AS/NZS 2918:2001 AND IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001 including Appendix F. The minimum clearance to combustibles may be reduced if the combustibles are shielded with an approved non-combustible material. Details of suitable shielding materials and appropriate clearance reduction factors are present in Section 3 of AS/NZS 2918:2001.

Clean Air Authorisation #N0024

RETAIL LINKS LTD RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE.

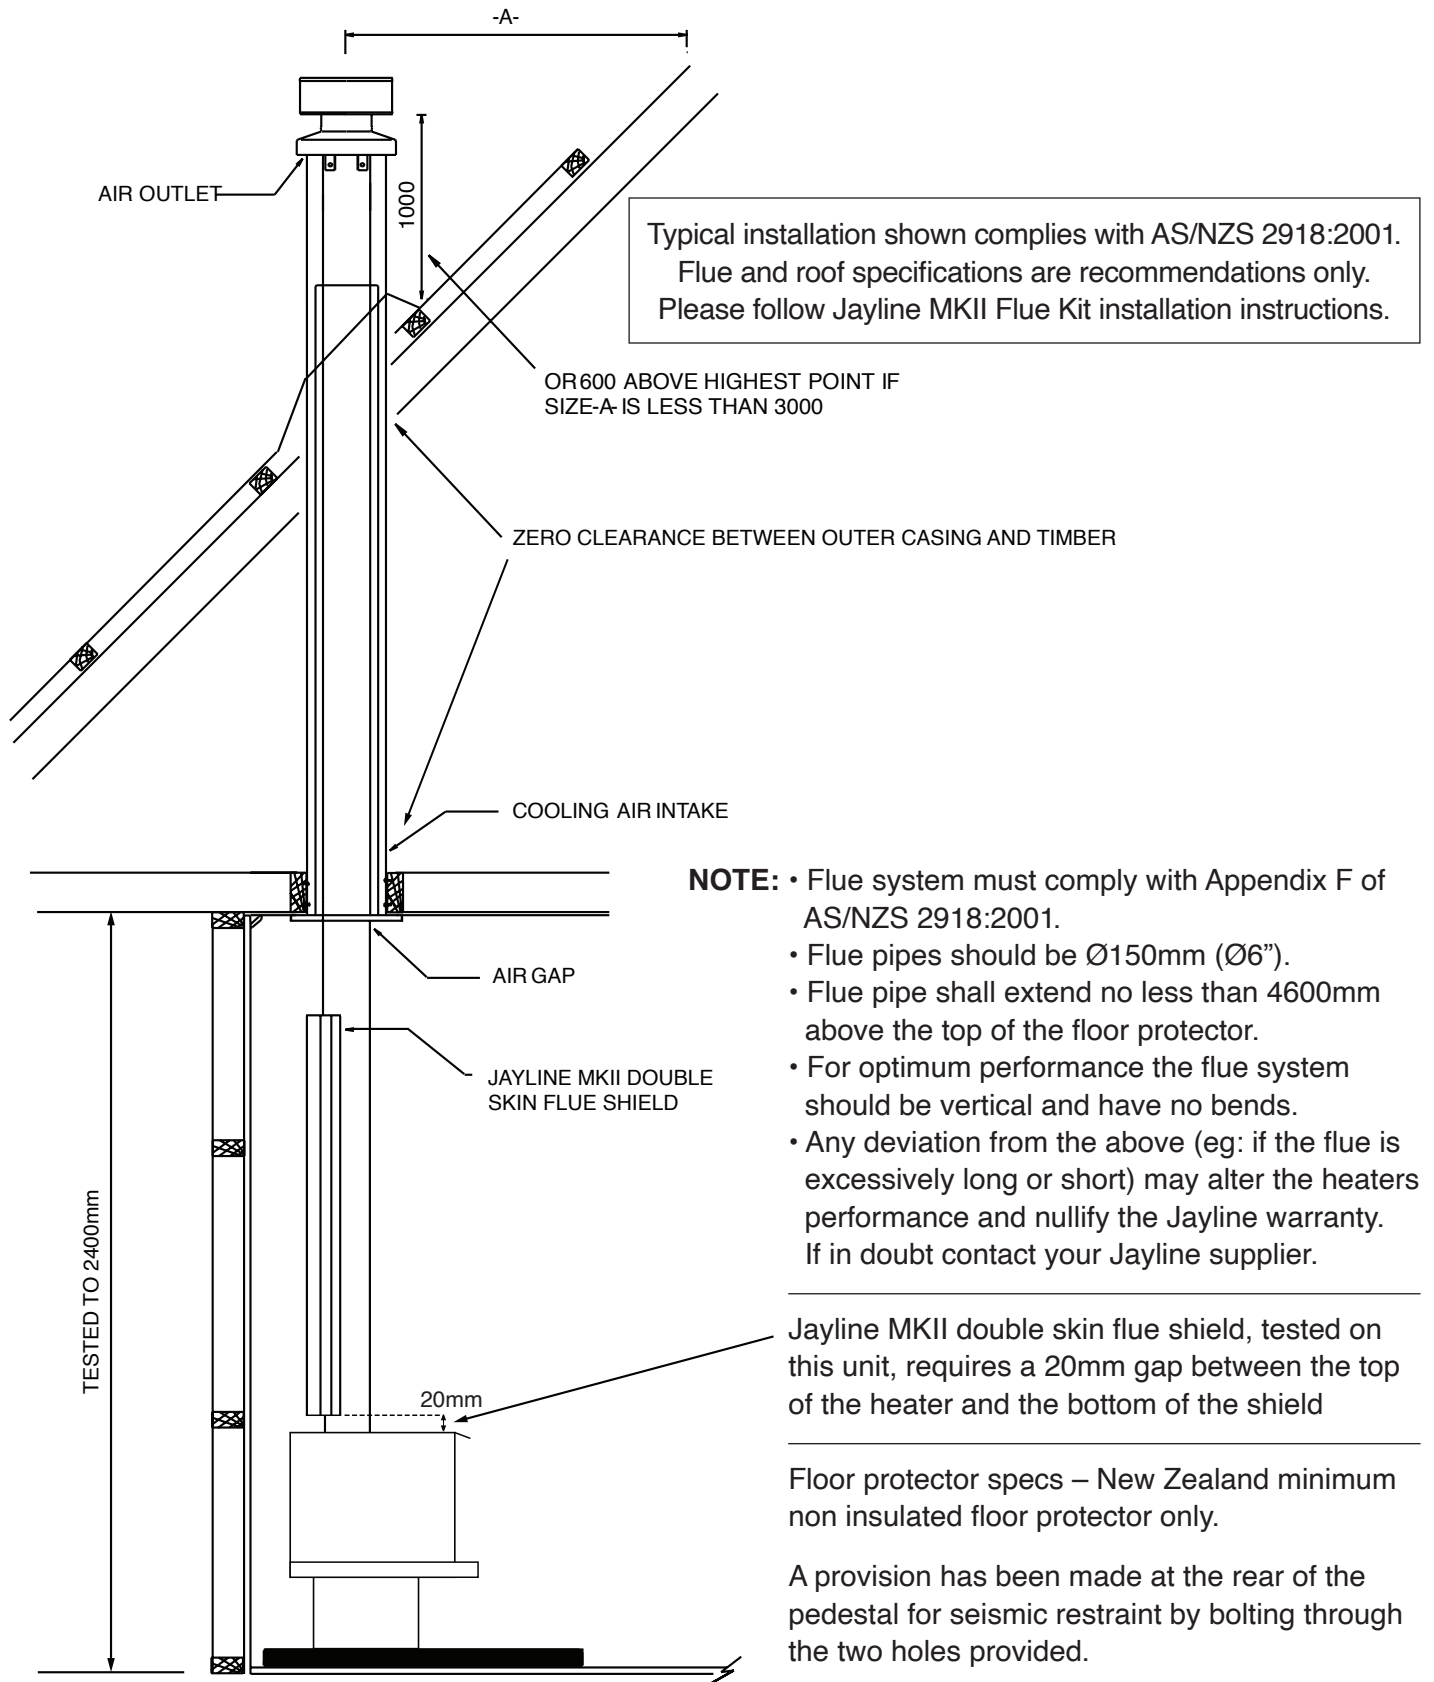

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001 including Appendix F.