




FREE STANDING SPECIFICATIONS

# BLLENHEIM

Effective December 2003

PAGE 1 OF 2

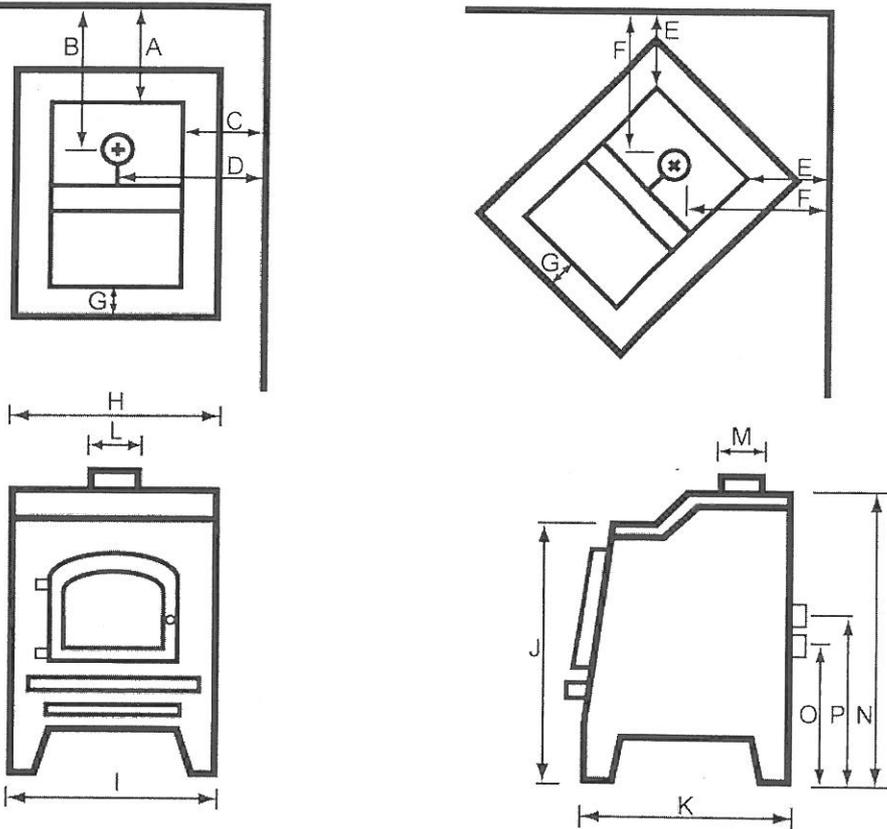

Blenheim Specifications

	A	B	C	D	E	F	G
New Zealand with S/S Flue Screen 1200	450	600	750	1045	600	925	300
New Zealand without flue screen	725	875	775	1070	600	925	300
Fisher Heatshield and S/S Screen	200	350	360	655	250	575	300


	H	I	J	K	L	M	N	O	P
Measurements	585	540	620	550	150	150	740	465	490

	DEPTH	WIDTH
Minimum Hearth Size	1020	1200

Estimated Peak Output (KW)	Max Log Length	Water Heating Option	Overnight Burning	Insulated Hearth
20	460	YES	YES	YES

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001

RETAIL LINKS LTD RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE

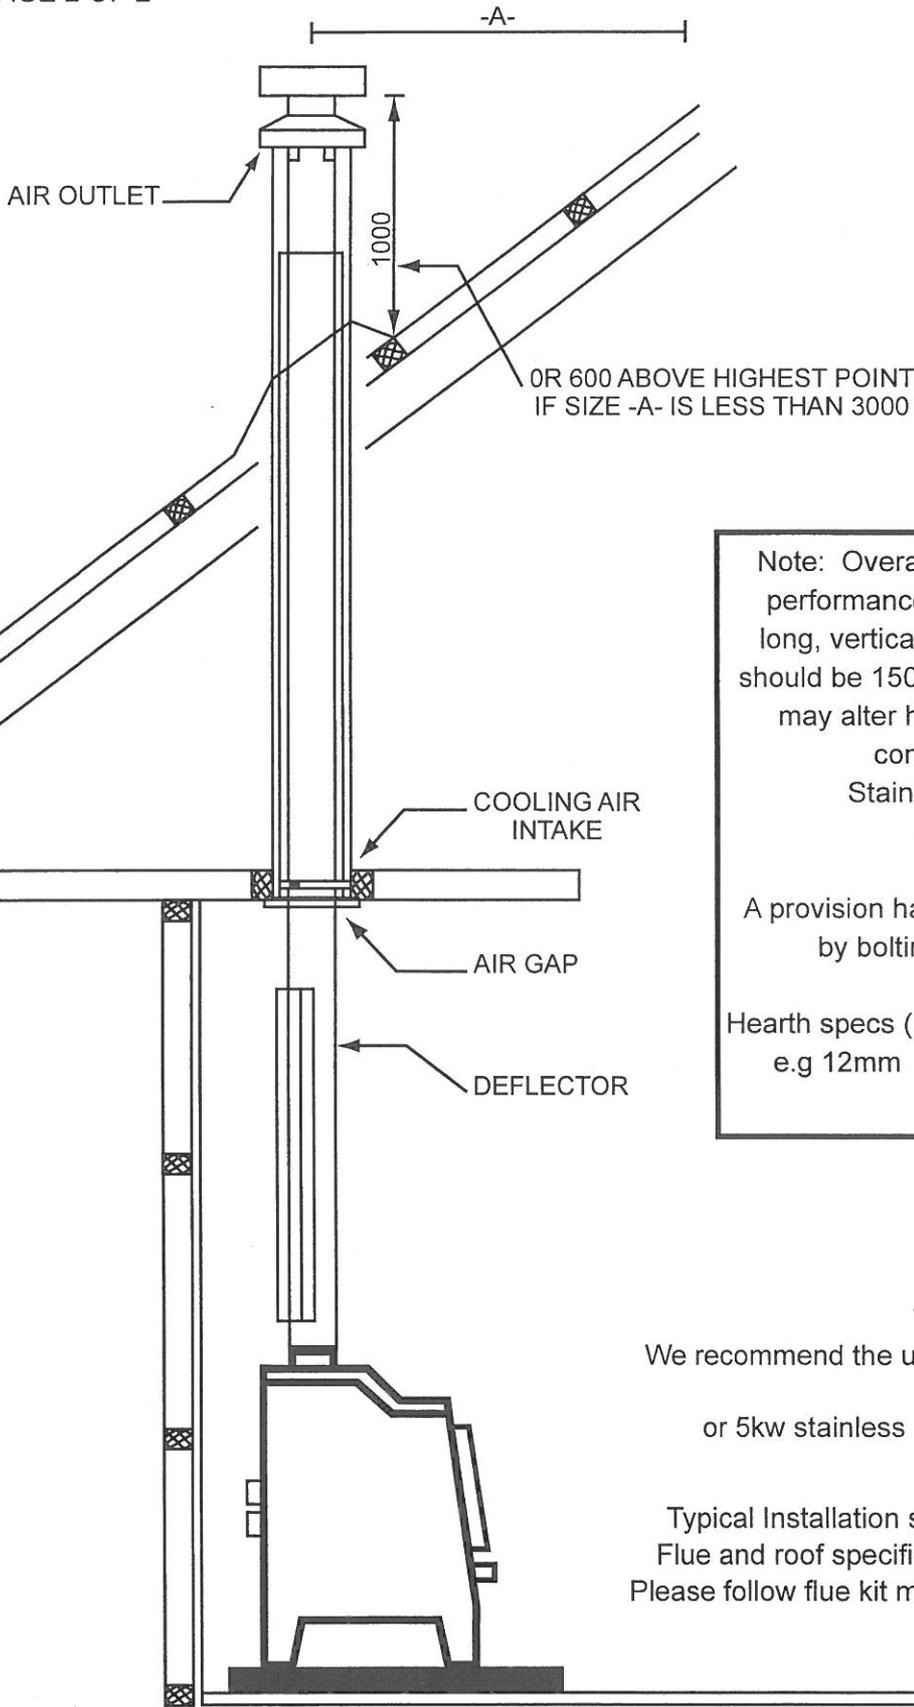

Note: Overall flue system length for optimum performance should be between 4200-4800 long, vertical and have no bends. Flue pipes should be 150mm Diameter. Deviation from this may alter heaters performance. If in doubt contact your Fisher supplier.  
Stainless Steel deflector tested on this unit.

A provision has been made for seismic restraint by bolting through holes in rear legs.

Hearth specs (New Zealand) Ash Hearth Minimum e.g 12mm ceramic tiles glued directly on a heat sensitive base.

**Water Booster**

We recommend the use of the "Superior" 2.6 Kw Booster P/N 127526 or 5kw stainless steel wetback P/N SUP-RE001

Typical Installation shown complies with AS/NZS2918 Flue and roof specifications are recommendations only. Please follow flue kit manufacturers installation instructions.

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001

RETAIL LINKS LTD RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE