
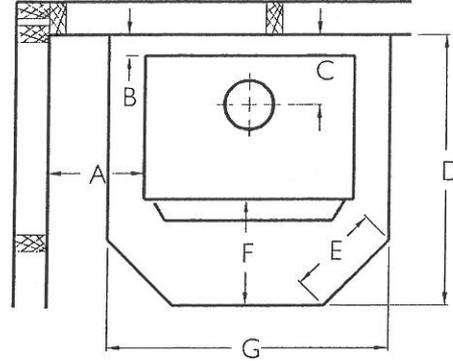


FREE STANDING SPECIFICATIONS




PAGE 1 OF 2

MODEL: CLASSIC FS09 (ASH HEARTH)

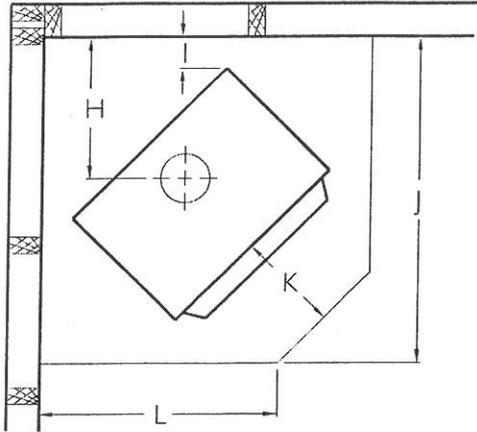

Dimension "F&K" are taken from door seal lip (Fire Box.) to the front of the hearth.

All Dimensions in Millimetres

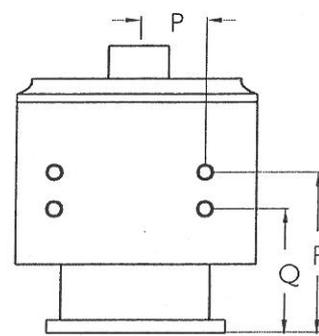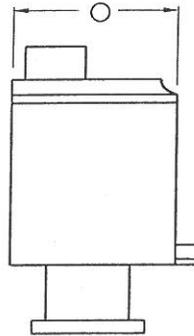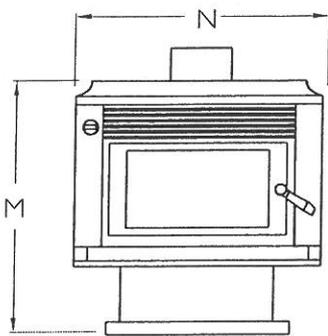

Classic Specifications

	A	B	C	D	E	F	G	H	I	J	K	L
New Zealand with S/S Flue Screen 1200	274	95	236	735	166	200	800	355	25	950	200	465

	M	N	O	P	Q	R
Measurements	685	645	440	150	280	455

NZHHA tested Maximum Output (KW)	Industry Rated Peak Output (KW)	Max Log Length	Water Heating Option	Estimated Burn Time on low (HRS)	Ash Hearth
14.6	17	425	✓	8-10	✓


TESTED AND APPROVED TO THE FOLLOWING STANDARDS

NZS 7421

FREE STANDING SPECIFICATIONS

MODEL: CLASSIC FS09
(ASH HEARTH)

PAGE 2 OF 2

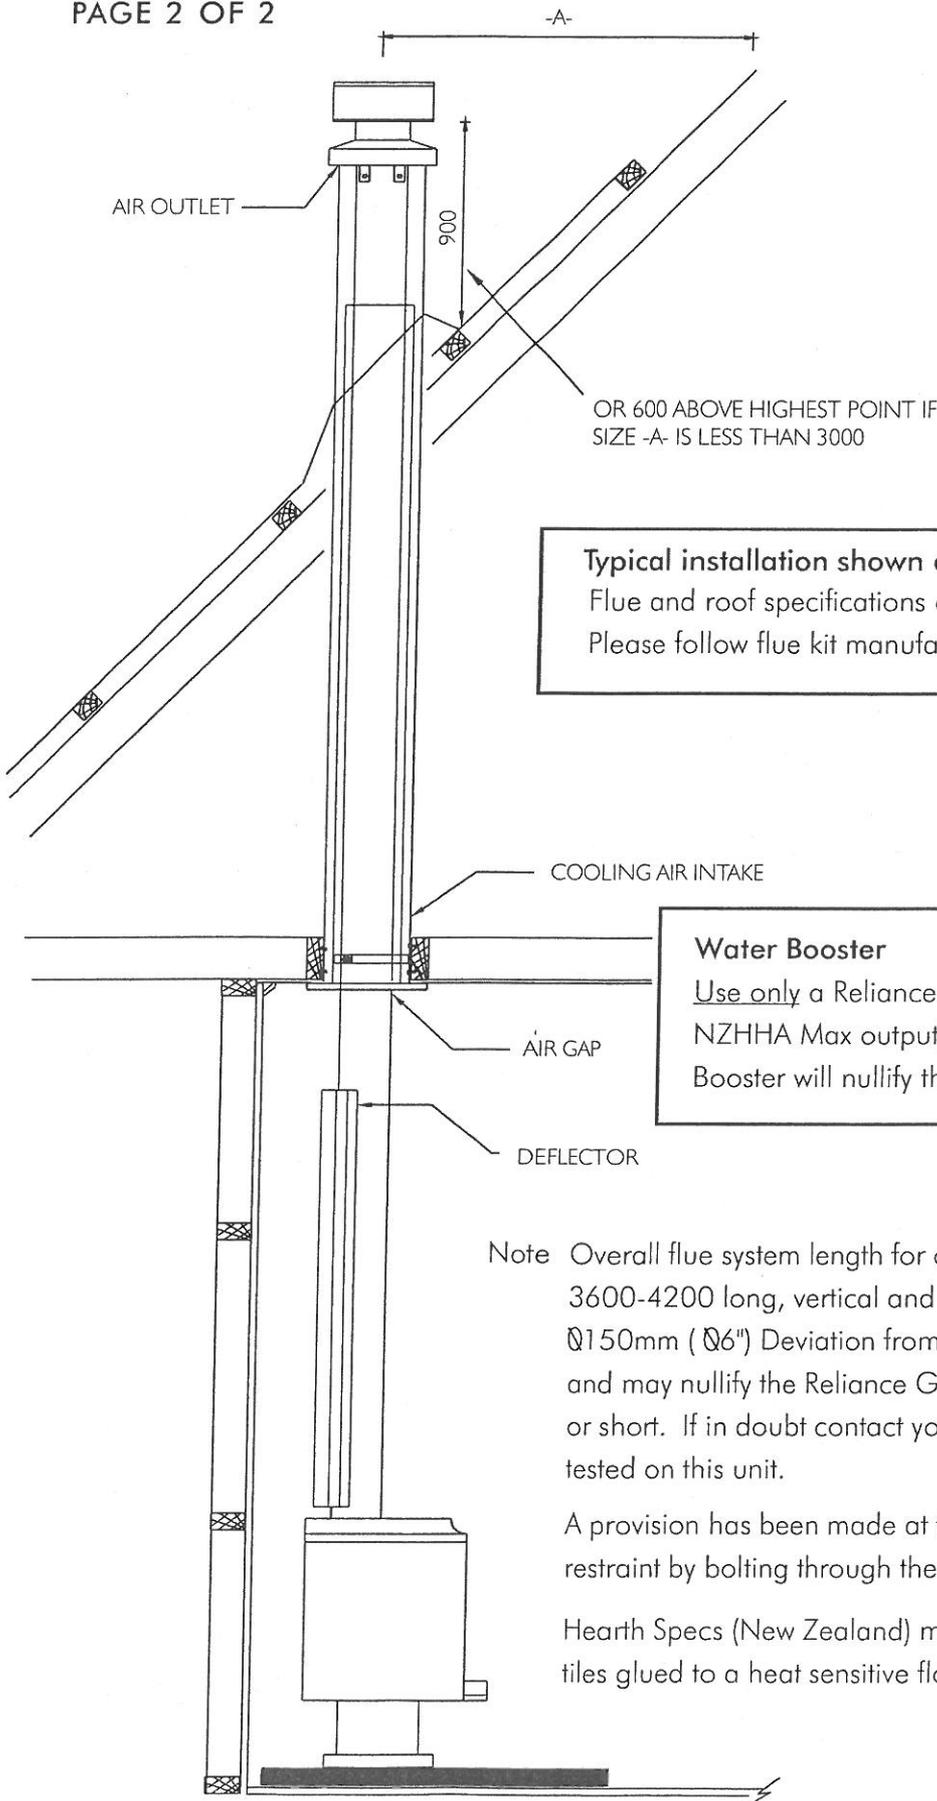

Typical installation shown complies with NZS7421
Flue and roof specifications are recommendations only.
Please follow flue kit manufacturers installation instructions.

Water Booster
Use only a Reliance Group Water Booster 2.0 Kw (tested to NZHHA Max output) part# 123699. Any other Water Booster will nullify the Reliance Group Warranty.

Note Overall flue system length for optimum performance should be between 3600-4200 long, vertical and have no bends. Flue pipes should be Ø150mm (Ø6") Deviation from this may alter the heaters performance and may nullify the Reliance Group warranty if the flue is excessively long or short. If in doubt contact your Jayline supplier. Stainless steel deflector tested on this unit.

A provision has been made at the rear of the pedestal for seismic restraint by bolting through the two holes provided

Hearth Specs (New Zealand) minimum Ash Hearth only e.g. Ceramic tiles glued to a heat sensitive floor.