
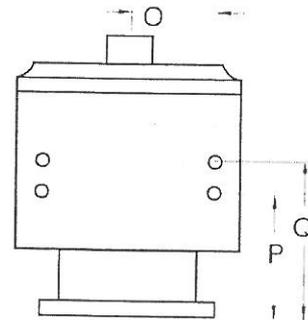
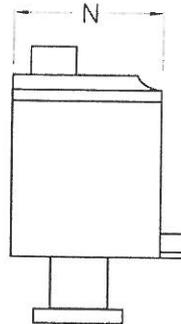


Dimension "C" is taken from door seal lip (Fire Box.) to the front of the hearth.

All Dimensions in Millimetres

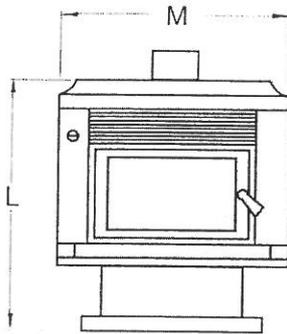

Spitfire Specifications

	A	B	C	E	F	G	H	I	J	K
New Zealand with S/S Flue Screen 1200	100	274	300	25	240	597	355	800	840	1000

	L	M	N	O	P	Q
Measurements	685	645	440	150	280	455


NZHHA tested Maximum Output (KW)	Industry Fated Peak Output (KW)	Water Heating Option	Estimated Burn Time on low (HRS)	Ash Hearth
13.5	17	✓	8-10	✓

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001

RETAIL LINKS RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESGNS WITHOUT PRIOR NOTICE

INSERT SPECIFICATIONS

PAGE 2 OF 2

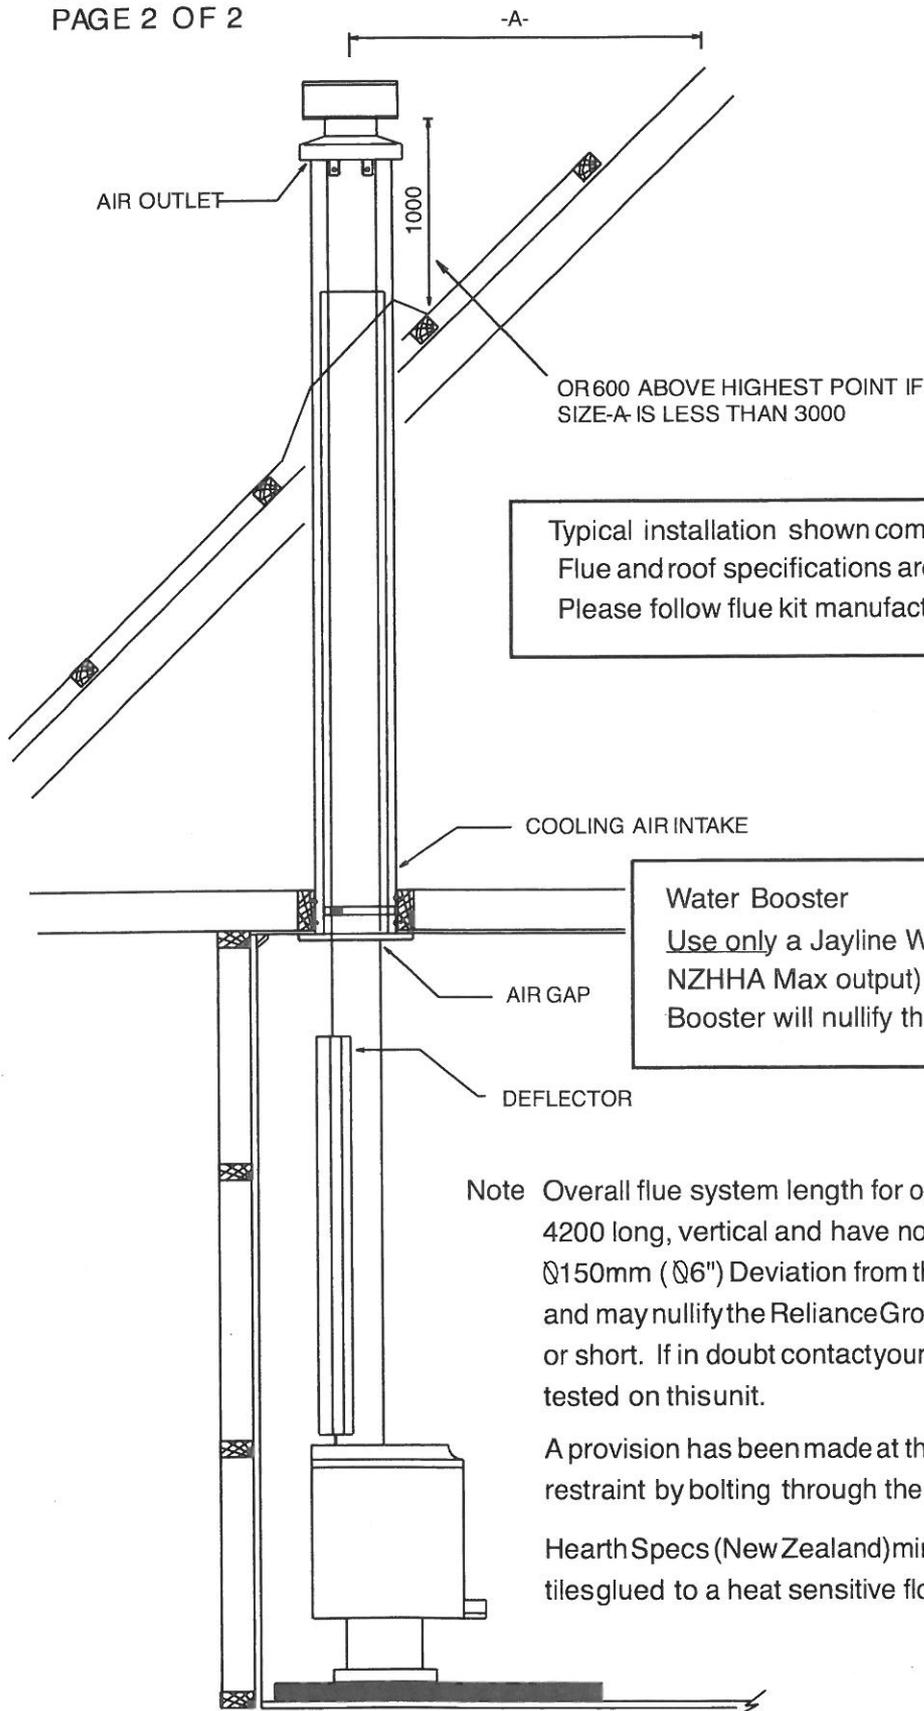

Typical installation shown complies with AS/NZS 2918
Flue and roof specifications are recommendations only.
Please follow flue kit manufacturers installation instructions.

Water Booster
Use only a Jayline Water Booster 2.0Kw (tested to NZHHA Max output) part# 123699. Any other Water Booster will nullify the Jayline Warranty.

Note Overall flue system length for optimum performance should be 4200 long, vertical and have no bends. Flue pipes should be Ø150mm (Ø6") Deviation from this may alter the heaters performance and may nullify the RelianceGroup warranty if the flue is excessively long or short. If in doubt contact your Jayline supplier Stainless steel deflector tested on this unit.

A provision has been made at the rear of the pedestal for seismic restraint by bolting through the two holes provided

Hearth Specs (New Zealand) minimum AshHearth only e.g. Ceramic tiles glued to a heat sensitive floor.

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001