
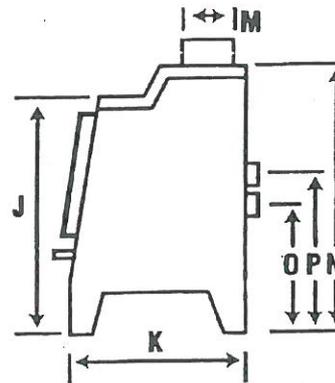
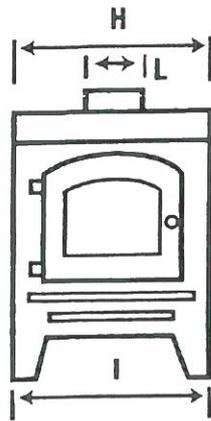
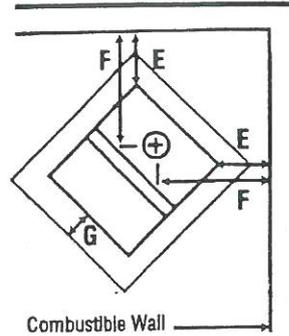


FREE STANDING SPECIFICATIONS

MODEL: CHARLESTON

PAGE 1 OF 2

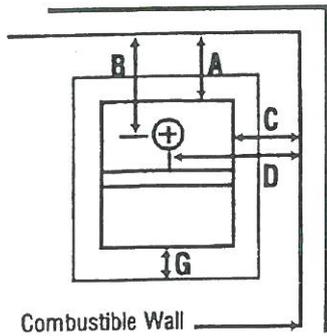

Charleston Specifications

	A	B	C	D	E	F	G
New Zealand with S/S Flue Screen 1200	320	470	650	905	450	735	200
Fisher Heatshield and S/S Screen	250	400	440	695	280	565	200

	H	I	J	K	L	M	N	O	P
Measurements	510	475	610	550	150	150	700	490	520

	DEPTH	WIDTH
Minimum Hearth Size	1000	980


Estimated Peak Output (KW)	Max Log Length	Water Heating Option	Overnight Burning	Insulated Hearth
17	410	✓	✓	✓

TESTED AND APPROVED TO THE FOLLOWING STANDARDS

NZS 7421: 1990

FREE STANDING SPECIFICATIONS

PAGE 2 OF 2

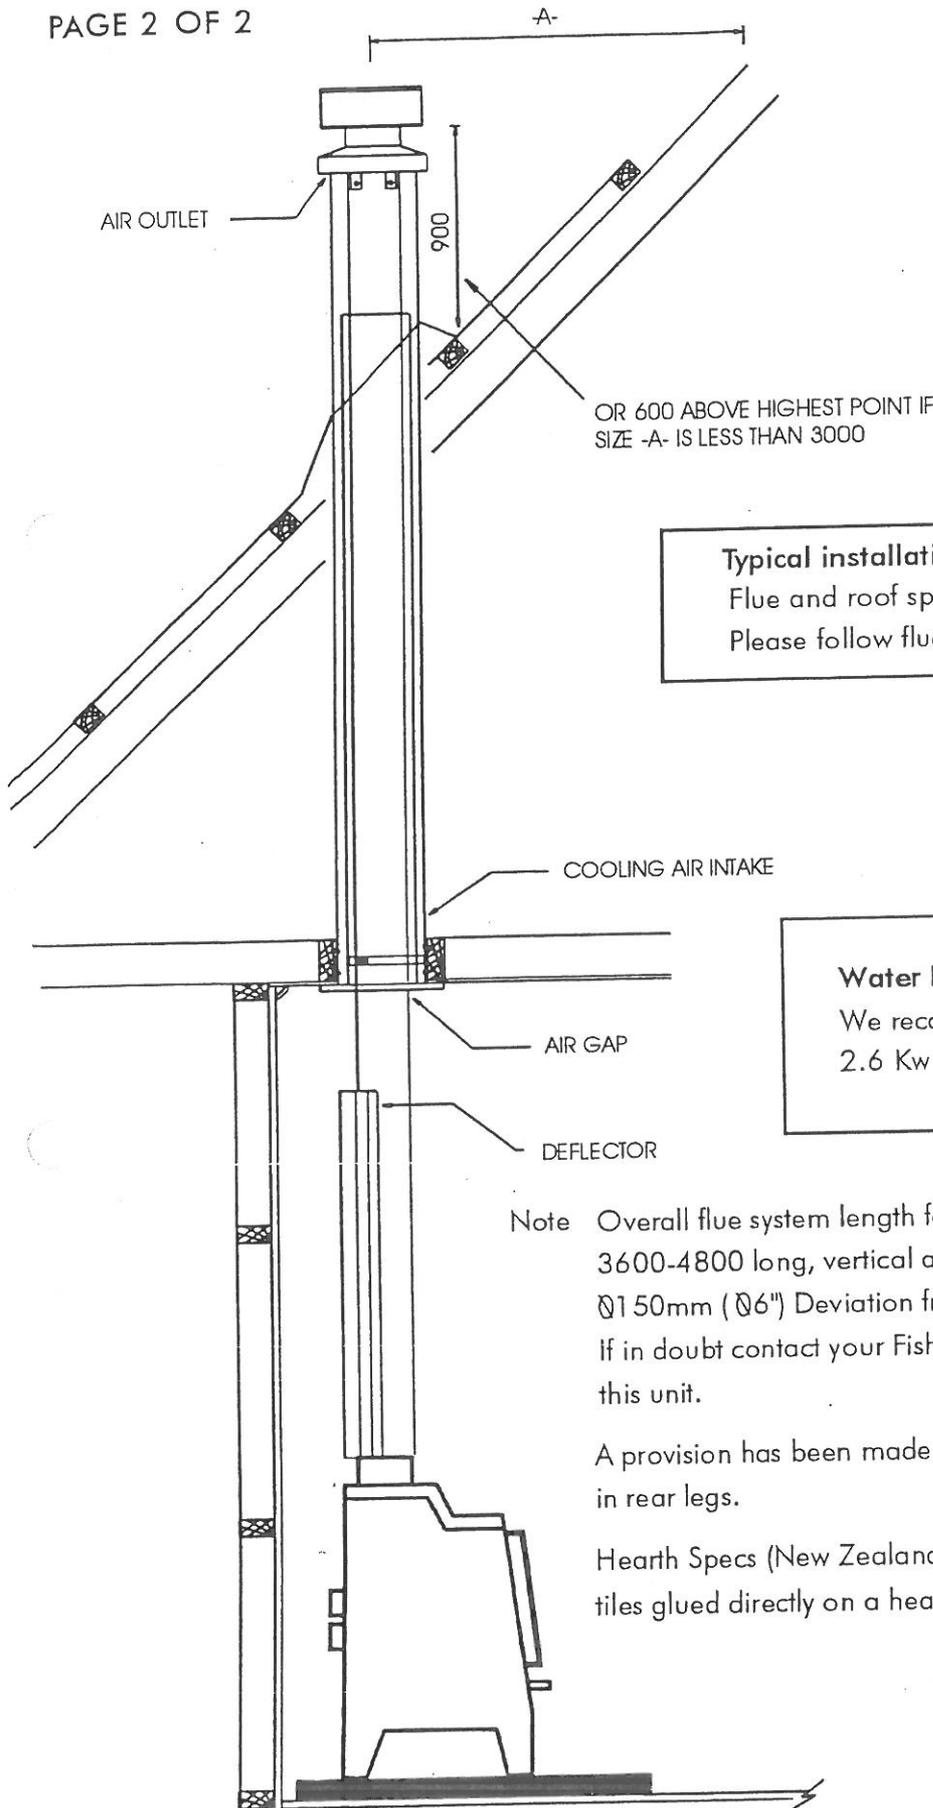

Typical installation shown complies with NZS7421
Flue and roof specifications are recommendations only.
Please follow flue kit manufacturers installation instructions.

Water Booster

We recommend the use of the "Superior"
2.6 Kw Booster P/N 123697 (Tested with fire)

Note Overall flue system length for optimum performance should be between 3600-4800 long, vertical and have no bends. Flue pipes should be $\varnothing 150\text{mm}$ ($\varnothing 6"$) Deviation from this may alter heaters performance. If in doubt contact your Fisher supplier. Stainless steel deflector tested on this unit.

A provision has been made for seismic restraint by bolting through holes in rear legs.

Hearth Specs (New Zealand) Minimum 12mm decorative ceramic tiles glued directly on a heat sensitive base.