
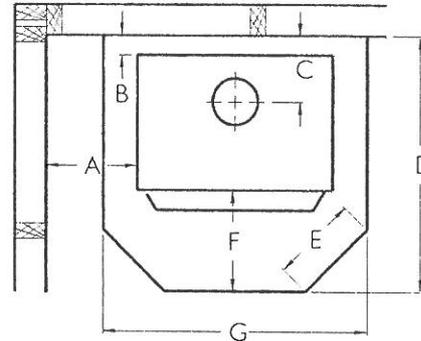





## FREE STANDING SPECIFICATIONS

PAGE 1 OF 2

## MODEL: CLASSIC FS09 (ASH HEARTH)

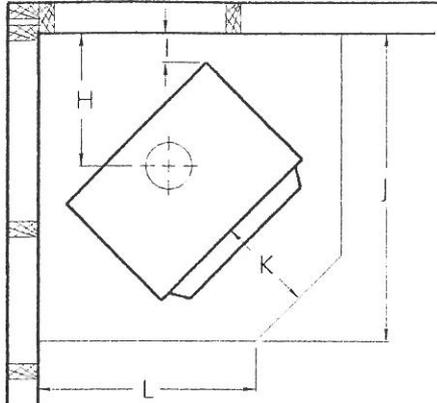

Dimension "F&K" are taken from door seal lip  
(Fire Box.) to the front of the hearth.  
All Dimensions in Millimetres

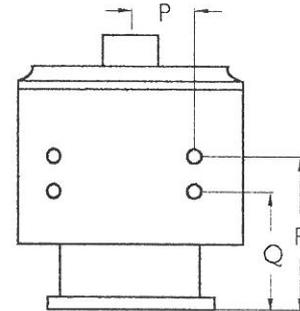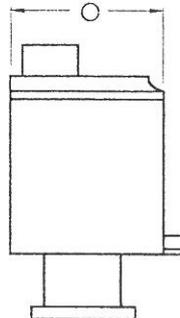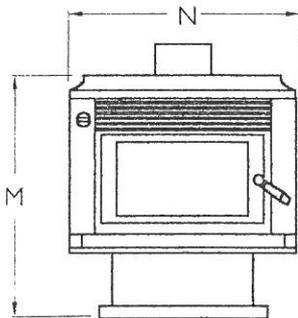

### Classic Specifications

	A	B	C	D	E	F	G	H	I	J	K	L
<b>New Zealand with S/S Flue Screen 1200</b>	204	95	236	735	166	200	800	348	18	935	200	458

	M	N	O	P	Q	R
<b>Measurements</b>	680	645	440	200	325	425

Estimated Peak Output (KW)	Normal Output (KW)	Water Heating Option	Estimated Burn Time on low (HRS)	Ash Hearth
17	14	✓	8-10	✓


### TESTED AND APPROVED TO THE FOLLOWING STANDARDS

NZS 7401: 1985 - AS2918: 1987. NZS 7403: 1993 - AS4013 (with water booster)

## FREE STANDING SPECIFICATIONS

PAGE 2 OF 2

## MODEL: CLASSIC FS09 (ASH HEARTH)

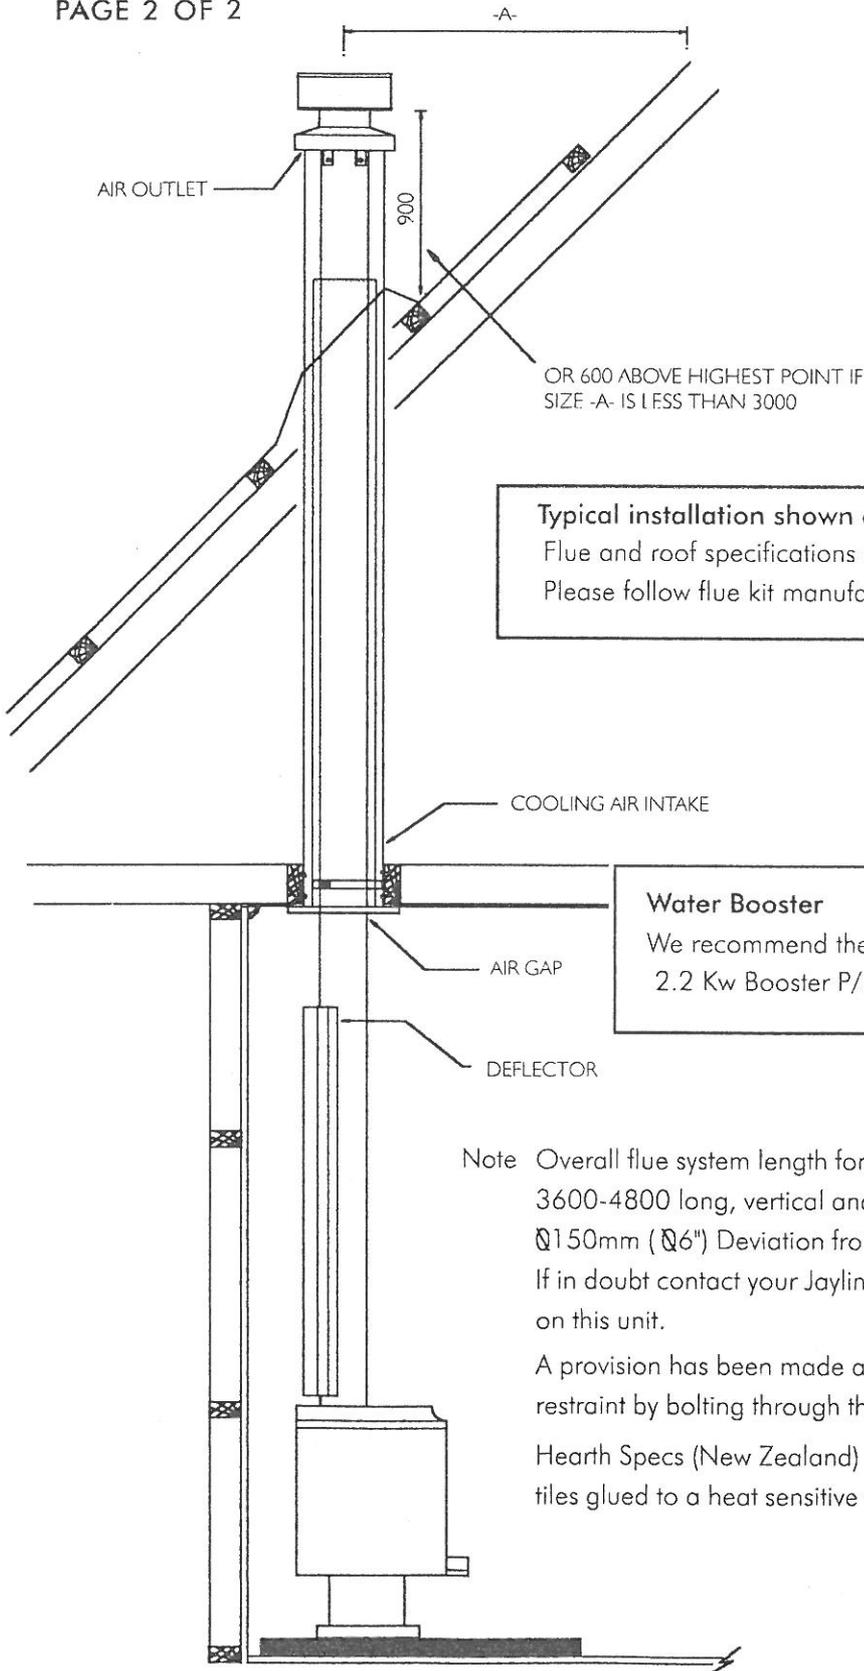

**Typical installation shown complies with NZS7421**  
Flue and roof specifications are recommendations only.  
Please follow flue kit manufacturers installation instructions.

**Water Booster**  
We recommend the use of the "Superior"  
2.2 Kw Booster P/N 112936 (Tested with fire)

**Note** Overall flue system length for optimum performance should be between 3600-4800 long, vertical and have no bends. Flue pipes should be Ø150mm (Ø6") Deviation from this may alter the heaters performance. If in doubt contact your Jayline supplier. Stainless steel deflector tested on this unit.

A provision has been made at the rear of the pedestal for seismic restraint by bolting through the two holes provided

Hearth Specs (New Zealand) minimum Ash Hearth only e.g. Ceramic tiles glued to a heat sensitive floor.