







# FREE STANDING SPECIFICATIONS

Effective December 2003

# HIGHWIC

PAGE 1 OF 2

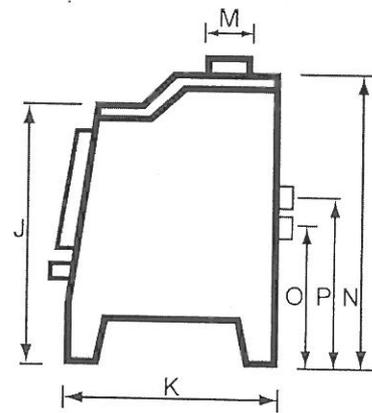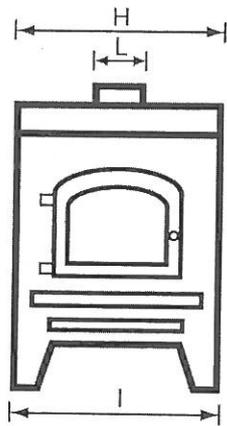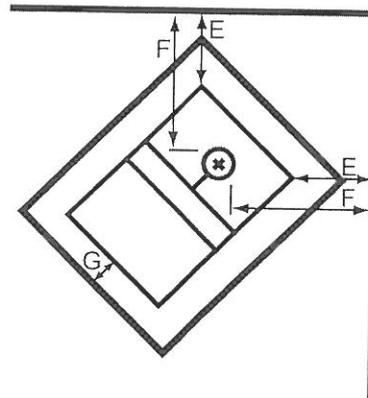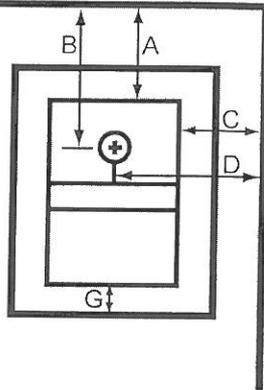

Highwic Specifications	A	B	C	D	E	F	G
New Zealand with S/S Double Skinned Flue Deflector 1200	100	270	300	535	80	360	300


	H	I	J	K	L	M	N	O	P
Measurements	470	450	540	550	150	150	595	380	410

	DEPTH	WIDTH
Minimum Hearth Size	950	950

Estimated Peak Output (KW)	Max Log Length	Water Heating Option	Overnight Burning	Insulated Hearth
14	350	YES	YES	NO

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001

RETAIL LINKS LTD RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE

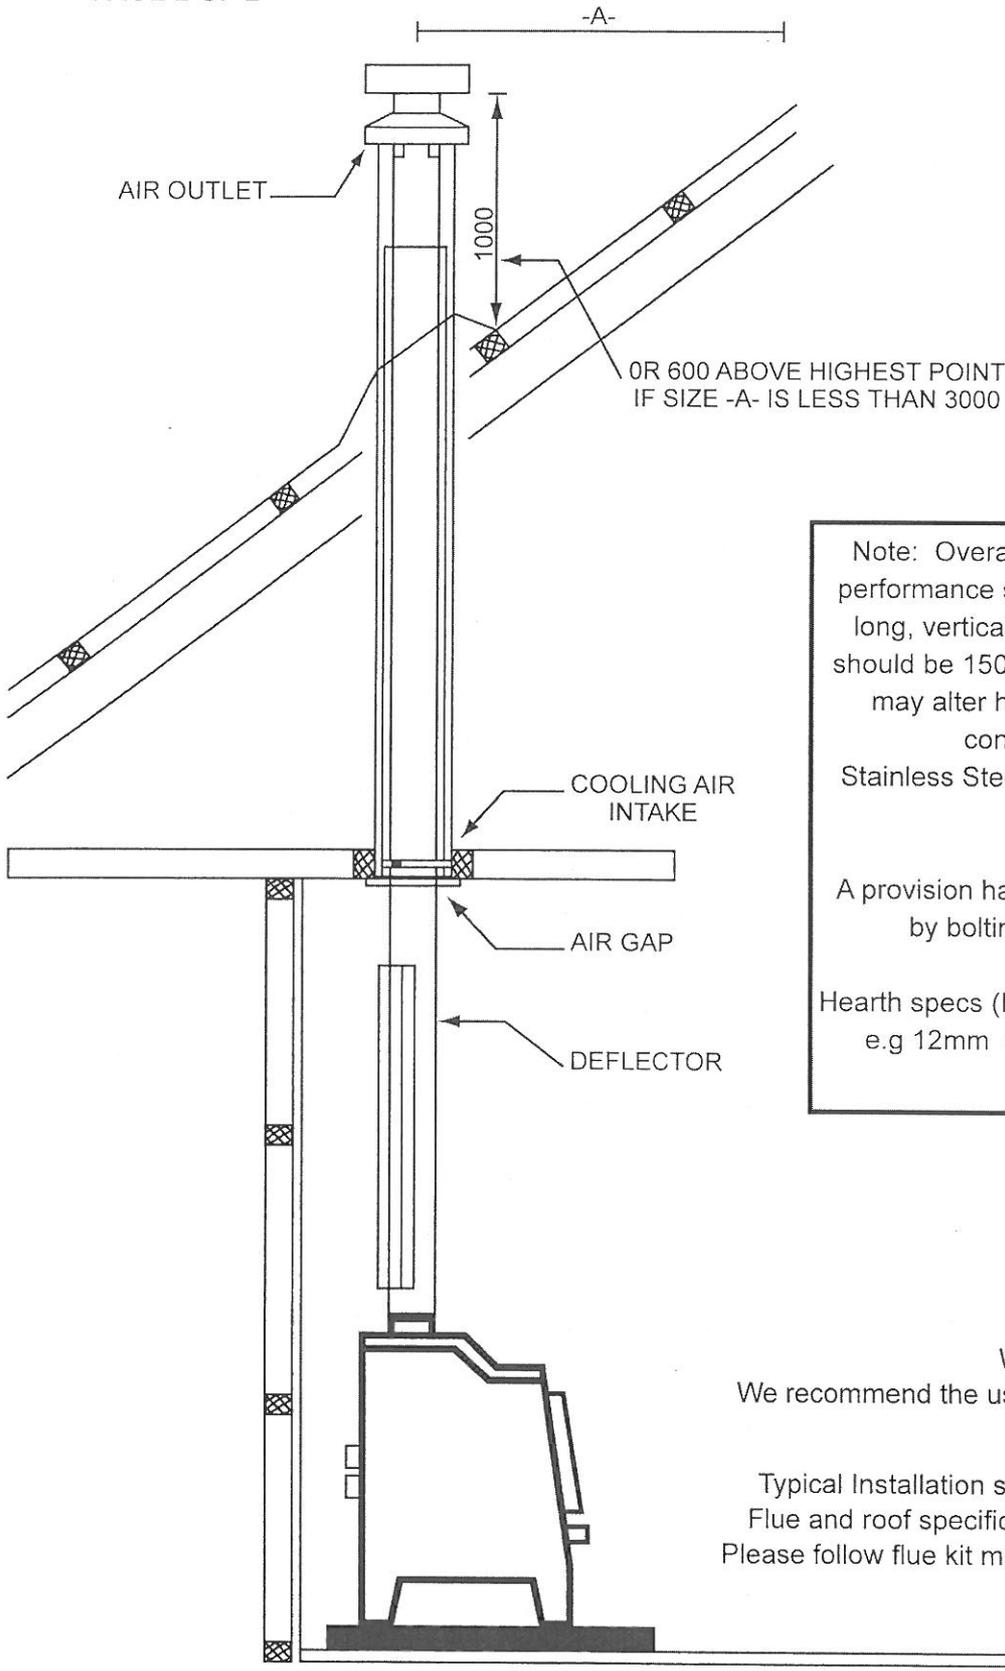

Note: Overall flue system length for optimum performance should be between 4200mm-4800 long, vertical and have no bends. Flue pipes should be 150mm Diameter. Deviation from this may alter heaters performance. If in doubt contact your Fisher supplier.  
Stainless Steel double skinned deflector tested on this unit.

A provision has been made for seismic restraint by bolting through holes in rear legs.

Hearth specs (New Zealand) Ash Hearth Minimum e.g 12mm ceramic tiles glued directly on a heat sensitive base.

Water Booster  
We recommend the use of the "Superior" 2.2 Kw Booster P/N 128889

Typical Installation shown complies with AS/NZS2918  
Flue and roof specifications are recommendations only.  
Please follow flue kit manufacturers installation instructions.

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001 (including appendix E)

RETAIL LINKS LTD RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE