

Lochinvar Specifications

	A	B	C	D	E	F	G
New Zealand with S/S Flue Screen 1200	500	675	900	1225	625	990	350
New Zealand without Flue Screen	850	1025	900	1225	625	990	350


	H	I	J	K	L	M	N	O	P
Measurements	650	595	665	700	200	200	825	485	525

	DEPTH	WIDTH
Minimum Hearth Size	1120	1200

Estimated Peak Output (KW)	Max Log Length	Water Heating Option	Overnight Burning	Insulated Hearth
27	520	YES	YES	YES

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001

RETAIL LINKS LTD RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE

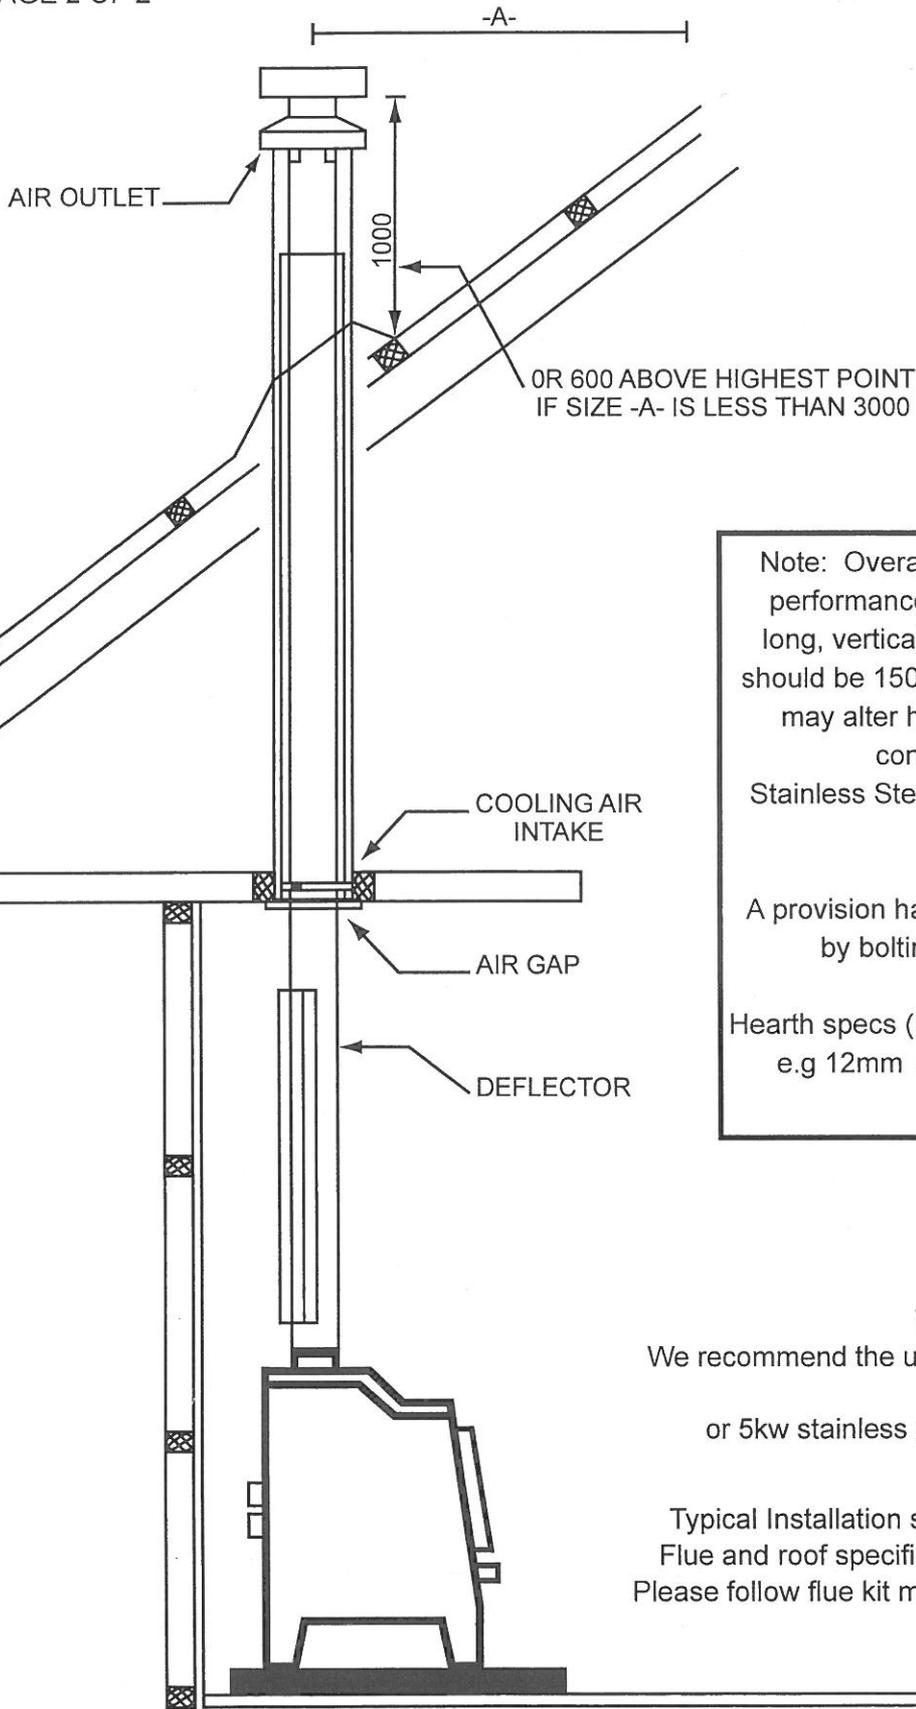

Note: Overall flue system length for optimum performance should be between 4200-4800 long, vertical and have no bends. Flue pipes should be 150mm Diameter. Deviation from this may alter heaters performance. If in doubt contact your Fisher supplier.  
Stainless Steel double skinned deflector tested on this unit.

A provision has been made for seismic restraint by bolting through holes in rear legs.

Hearth specs (New Zealand) Ash Hearth Minimum e.g 12mm ceramic tiles glued directly on a heat sensitive base.

Water Booster  
We recommend the use of the "Superior" 2.8 Kw Booster P/N 127526  
or 5kw stainless steel wetback P/N SUP-RE001

Typical Installation shown complies with AS/NZS2918  
Flue and roof specifications are recommendations only.  
Please follow flue kit manufacturers installation instructions.

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001

RETAIL LINKS LTD RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE