
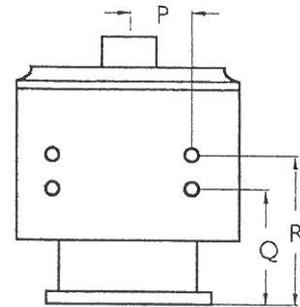
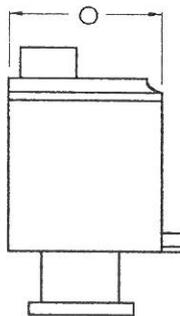


Dimension "F&K" are taken from door seal lip (Fire Box.) to the front of the hearth.
All Dimensions in Millimetres

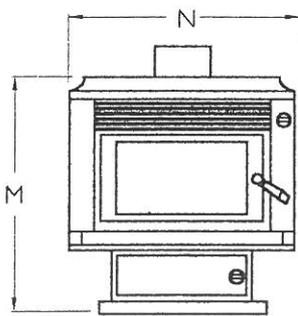

Magic Specifications

	A	B	C	D	E	F	G	H	I	J	K	L
New Zealand with S/S Flue Screen 1200	275	71	191	1021	431	520	1200	367	41	1184	520	701

	M	N	O	P	Q	R
Measurements	680	645	440	200	325	425

Estimated Peak Output (KW)	Normal Output (KW)	Max Log Length	Water Heating Option	Estimated Burn Time on low (HRS)	Insulation Hearth
22	19	425	✓	10-12	✓


TESTED AND APPROVED TO THE FOLLOWING STANDARDS

(NZS 7421: 1990)

FREE STANDING SPECIFICATIONS

PAGE 2 OF 2

MODEL: MAGIC FS13
MULTIFUEL

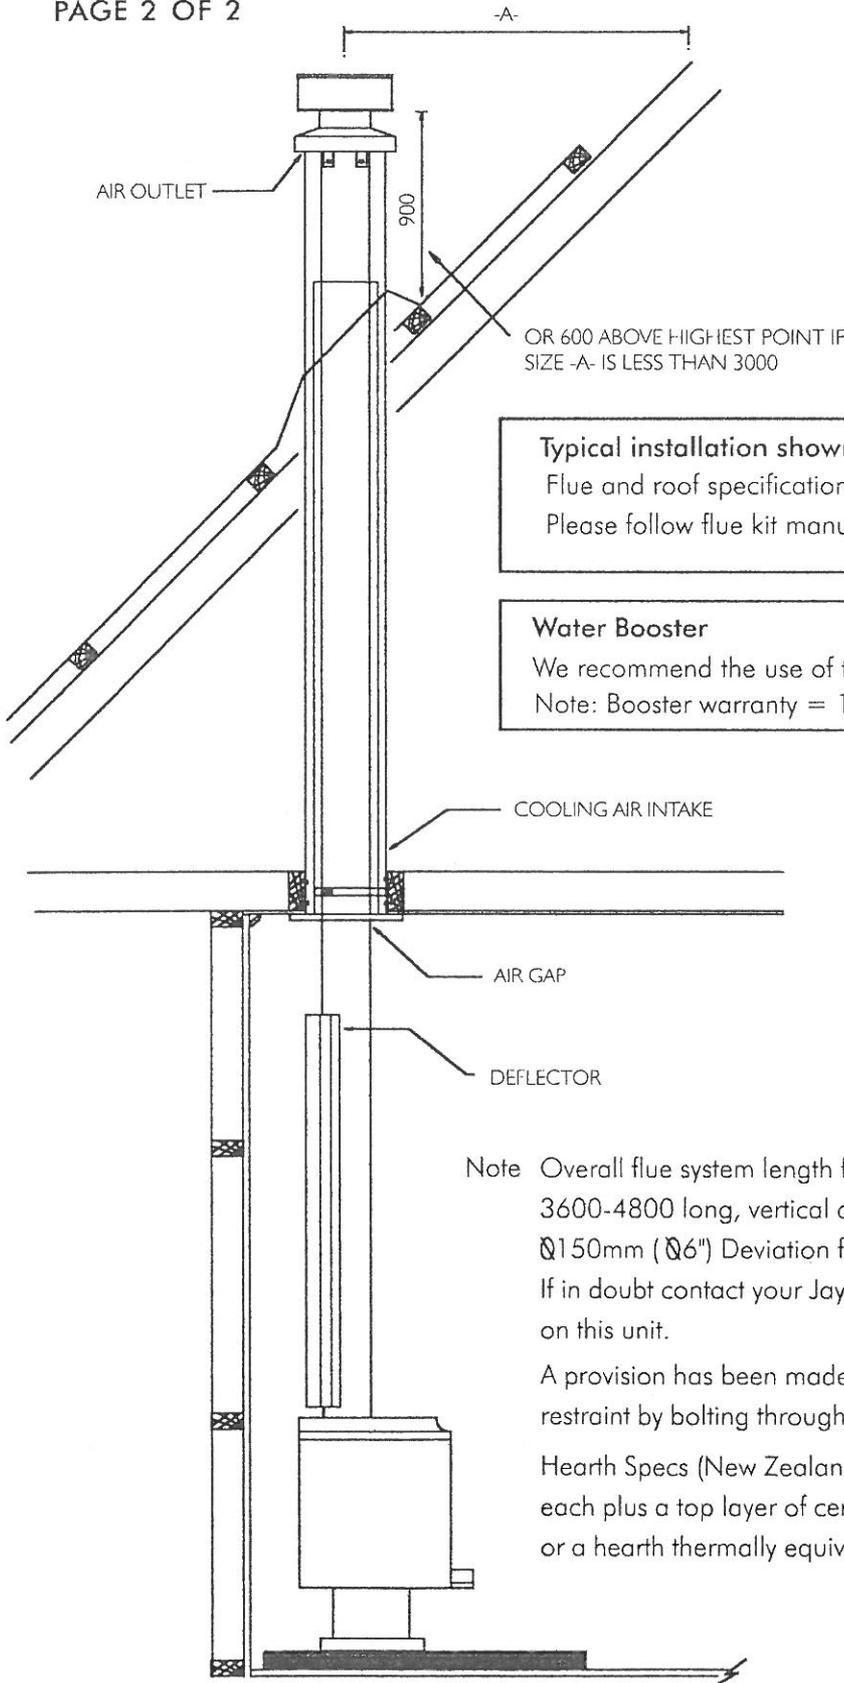

Typical installation shown complies with NZS7421
Flue and roof specifications are recommendations only.
Please follow flue kit manufacturers installation instructions.

Water Booster

We recommend the use of the "Superior" 2.2 Kw Booster P/N 112936
Note: Booster warranty = 12 months

Note Overall flue system length for optimum performance should be between 3600-4800 long, vertical and have no bends. Flue pipes should be $\varnothing 150\text{mm}$ ($\varnothing 6"$) Deviation from this may alter the heaters performance. If in doubt contact your Jayline supplier. Stainless steel deflector tested on this unit.

A provision has been made at the rear of the pedestal for seismic restraint by bolting through the two holes provided

Hearth Specs (New Zealand) Minimum 2 sheets of micore 160 X 16mm each plus a top layer of ceramic tiles equaling 50mm total thickness or a hearth thermally equivalent.