




Dimensions "K & F" are taken from door seal lip (Fire Box) to the front of the hearth.  
All Dimensions in Millimetres



Starfire Specifications

	A	B	C	D	E	F	G	H	I	J	K	L
New Zealand with S/S Flue Screen 1200	395	122	282	1024	166	200	895	443	100	1178	200	708

	M	N	O	P	Q	R
Measurements	720	620	702	200	373	473

Industry Rated Peak Output (KW)	Max Log Length	Water Heating Option	Estimated Burn Time on Low (HRS)	Ash Hearth
24	450	✓	10-12	✓


TESTED AND APPROVED TO THE FOLLOWING STANDARDS

NZS 7401:1985-AS2918:1987. NZS7403:1993-AS4013 (with water booster)

## FREE STANDING SPECIFICATIONS

MODEL: STARFIRE FS14

PAGE 2 OF 2

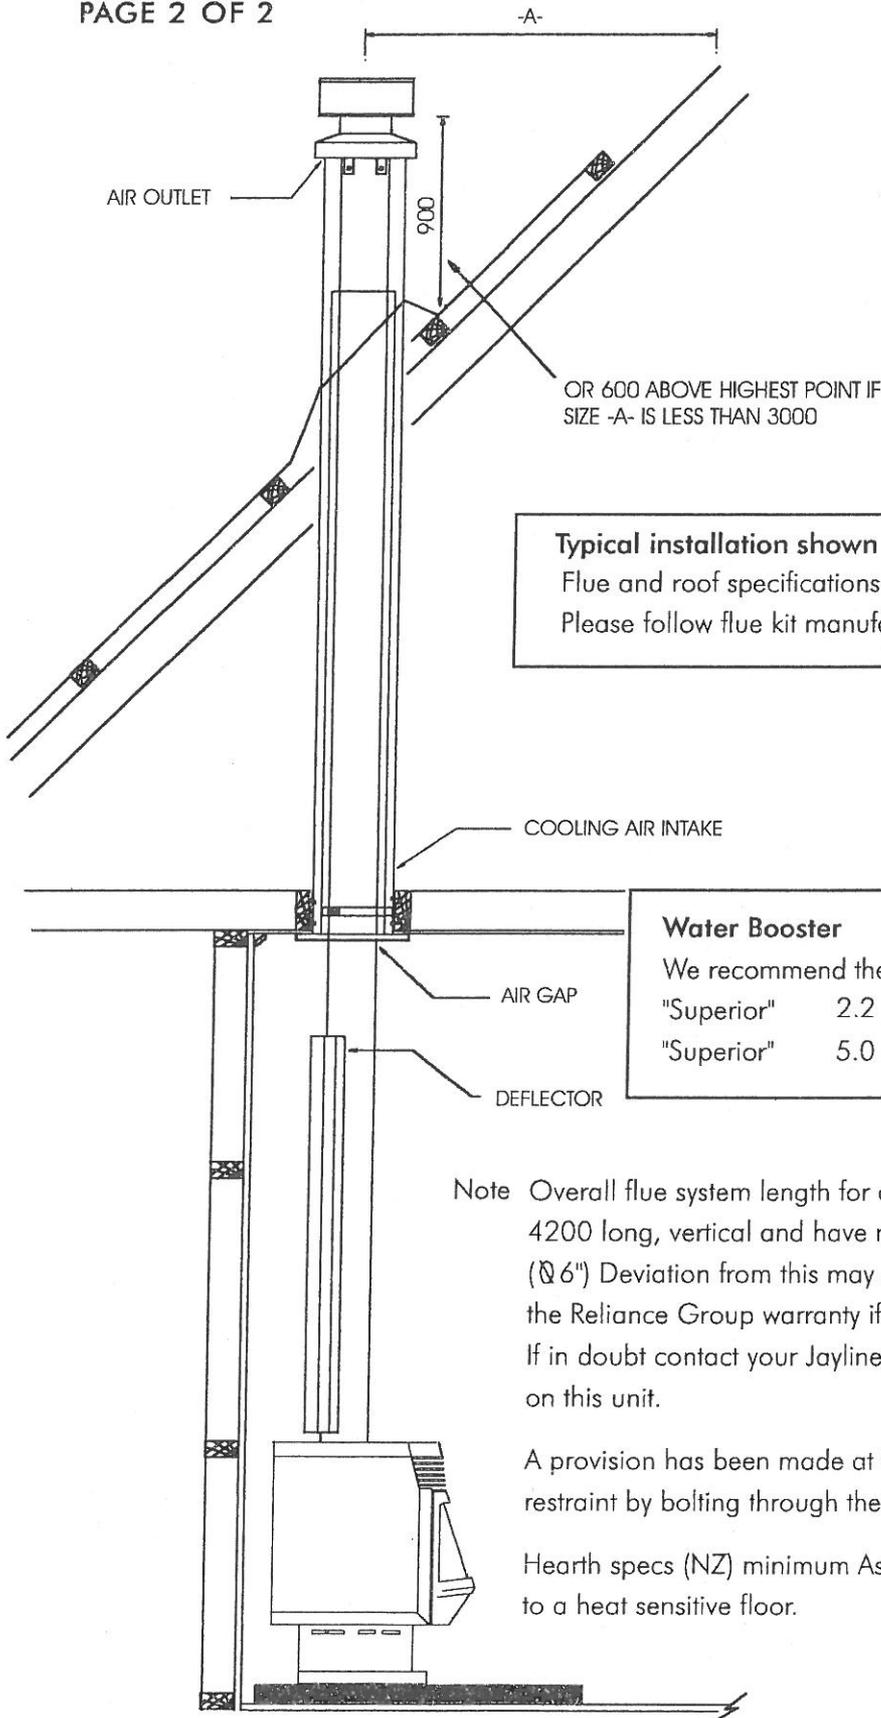

**Typical installation shown complies with NZS7421**  
 Flue and roof specifications are recommendations only.  
 Please follow flue kit manufacturers installation instructions.

### Water Booster

We recommend the use of the  
 "Superior" 2.2 Kw Booster P/N 112936 (Tested with fire)  
 "Superior" 5.0 Kw Booster P/N 112699

**Note** Overall flue system length for optimum performance should be 3600-4200 long, vertical and have no bends. Flue pipes should be  $\varnothing$  150mm ( $\varnothing$  6") Deviation from this may alter heaters performance and may nullify the Reliance Group warranty if the flue is excessively long or short. If in doubt contact your Jayline supplier. Stainless steel deflector tested on this unit.

A provision has been made at the rear of the pedestal for seismic restraint by bolting through the two holes provided

Hearth specs (NZ) minimum Ash Hearth only e.g ceramic tiles glued to a heat sensitive floor.