




Dimension "C" is taken from door seal lip (Fire Box.) to the front of the hearth.
All Dimensions in Millimetres



Saffire II Specifications

	A	B	C	E	F	G	H	I	J	K
New Zealand with S/S Flue Screen 1200	100	255	300	25	255	580	350	900	810	1000

	L	M	N	O	P	Q
Measurements	675	650	410	150	280	455

NZHHA tested Maximum Output (KW)	Industry Pated Peak Output (KW)	Water Heating Option	Estimated Burn Time on low (HRS)	Ash Hearth
12	15	✓	8-10	✓


IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001

RETAIL LINKS LTD RESERVE THE RIGHT TO CHANGE SPECIFICATIONS OR DESIGNS WITHOUT PRIOR NOTICE.

FREESTANDING SPECIFICATIONS

MODEL: RURAL

PAGE 2 OF 2

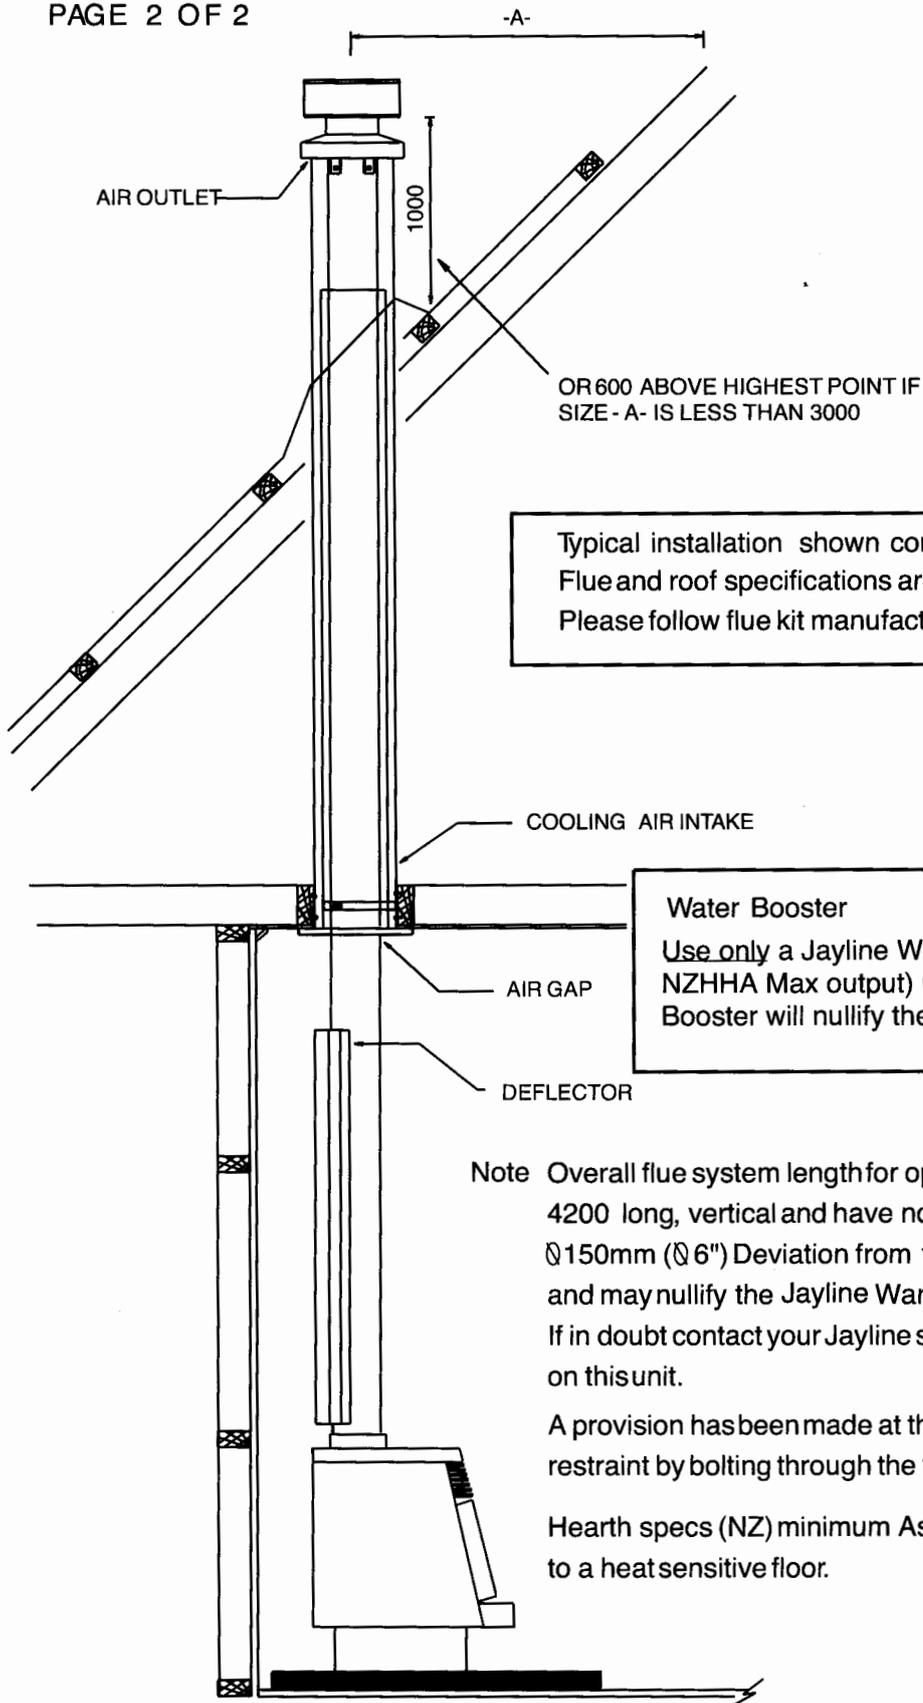

Typical installation shown complies with AS/NZS 2918
 Flue and roof specifications are recommendations only.
 Please follow flue kit manufacturers installation instructions.

Water Booster
 Use only a Jayline Water Booster 2.0 Kw (tested to NZHHA Max output) part# 123699. any other Water Booster will nullify the Jayline Warranty.

Note Overall flue system length for optimum performance should be 4200 long, vertical and have no bends. Flue pipes should be Ø150mm (Ø 6") Deviation from this may alter heaters performance, and may nullify the Jayline Warranty
 If in doubt contact your Jayline supplier. Stainless steel deflector tested on this unit.

A provision has been made at the rear of the pedestal for seismic restraint by bolting through the two holes provided

Hearth specs (NZ) minimum Ash Hearth only e.g ceramic tiles glued to a heat sensitive floor.

IF INSTALLED IN ACCORDANCE WITH THESE SPECIFICATIONS THE HEATER COMPLIES WITH AS/NZS 2918:2001