
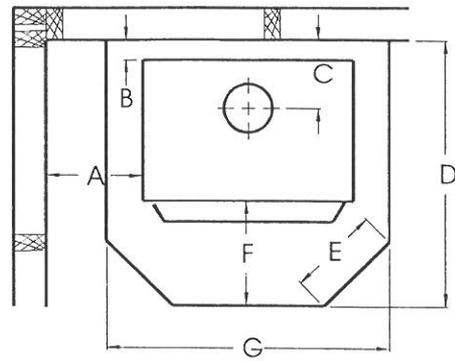





## FREE STANDING SPECIFICATIONS

## MODEL: SAFFIRE FS04

PAGE 1 OF 2

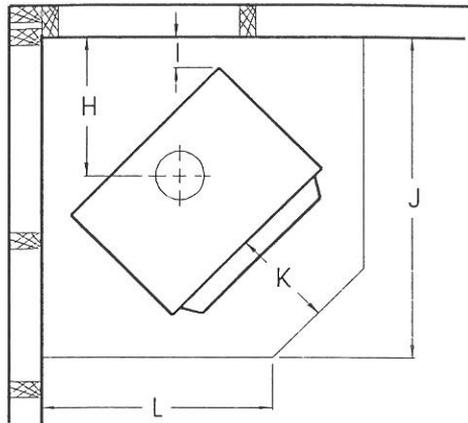

Dimensions "K & F" are taken from door seal lip (Fire Box.) to the front of the hearth.  
All Dimensions in Millimetres

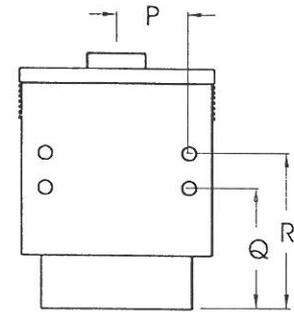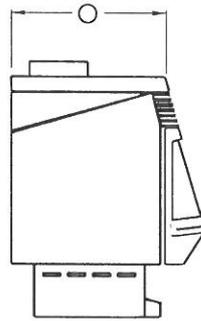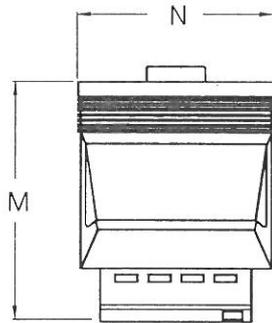

### Saffire Specifications

|                                       | A   | B   | C   | D   | E   | F   | G   | H   | I   | J   | K   | L   |
|---------------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| New Zealand with S/S Flue Screen 1200 | 260 | 60  | 205 | 700 | 250 | 200 | 850 | 290 | 5   | 860 | 200 | 410 |
| New Zealand without Flue Screen       | 260 | 300 | 445 | 940 | 280 | 200 | 850 | 415 | 130 | 985 | 200 | 530 |
| Australia with Flue Screen 900        | 240 | 55  | 200 | 800 | 280 | 300 | 860 | 290 | 5   | 860 | 300 | 550 |

|              | M   | N   | O   | P   | Q   | R   |
|--------------|-----|-----|-----|-----|-----|-----|
| Measurements | 665 | 535 | 430 | 150 | 290 | 390 |

| Estimated Peak Output (KW) | Normal Output (KW) | Max Log Length | Water Heating Option | Estimated Burn Time on low (HRS) | Insulation Hearth | Ash Hearth |
|----------------------------|--------------------|----------------|----------------------|----------------------------------|-------------------|------------|
| 15                         | 12                 | 350            | ✓                    | 8-10                             | --                | ✓          |

### TESTED AND APPROVED TO THE FOLLOWING STANDARDS


NZS 7401: 1985 - AS2918: 1987

NZS 7403:1993 - AS4013 (with water booster)

## FREE STANDING SPECIFICATIONS

MODEL: SAFFIRE FS04

PAGE 2 OF 2

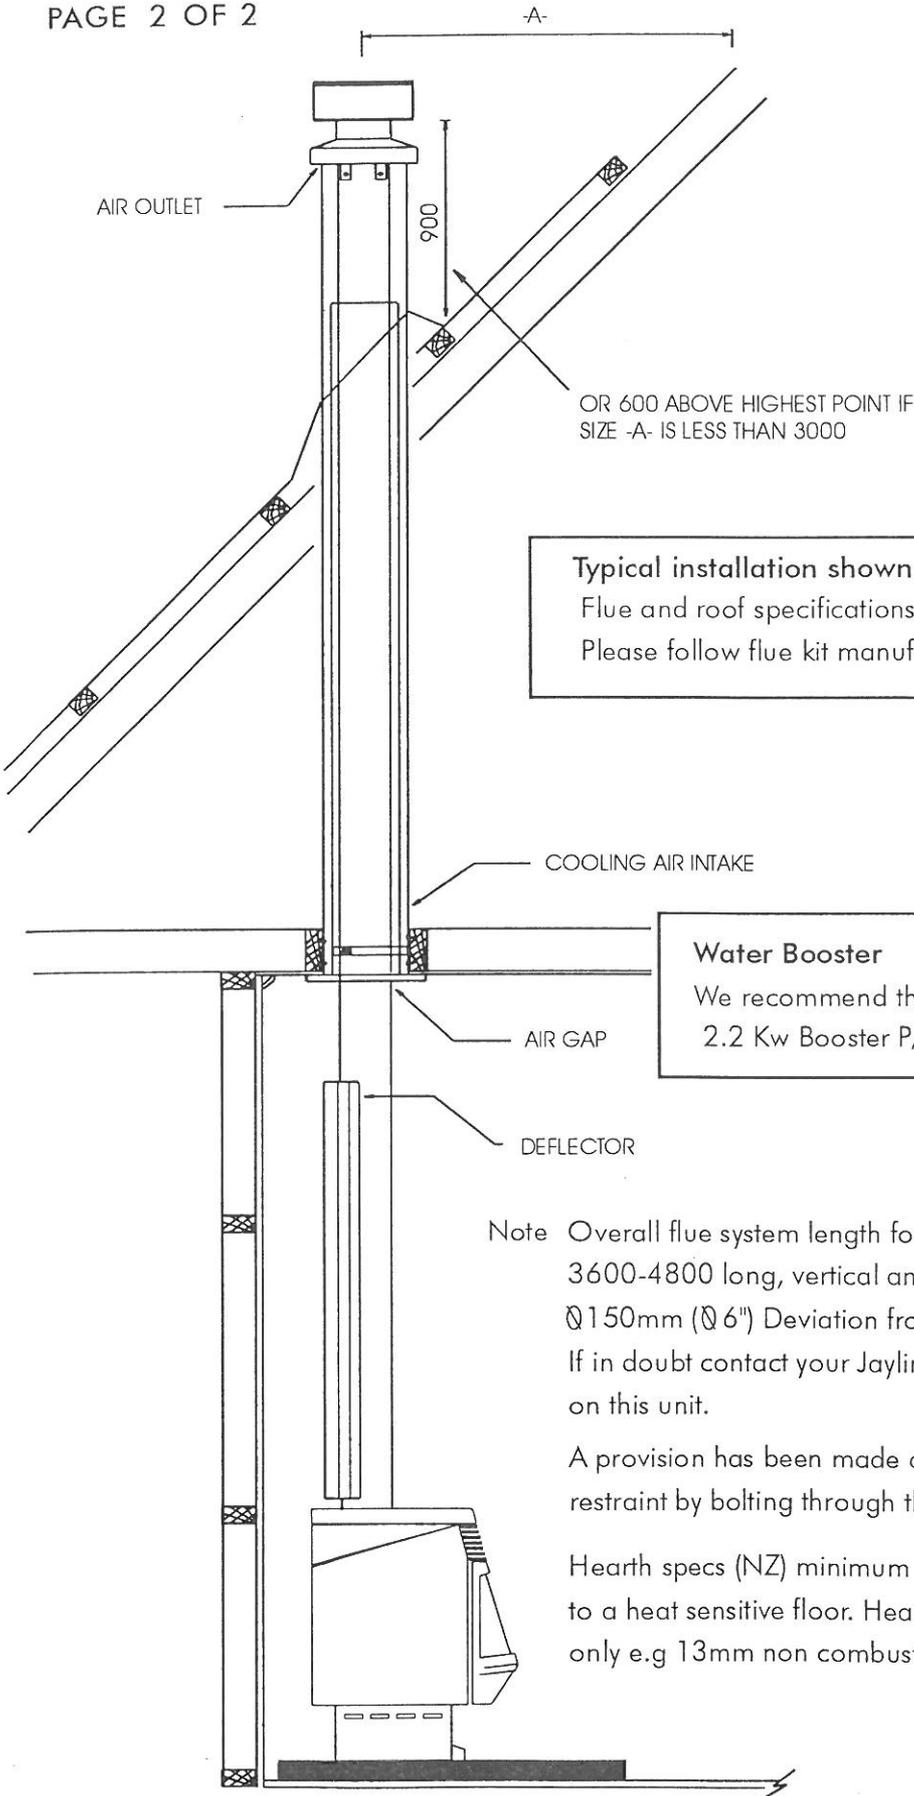

Typical installation shown complies with AS2918 and NZS7421  
Flue and roof specifications are recommendations only.  
Please follow flue kit manufacturers installation instructions.

### Water Booster

We recommend the use of the "Superior"  
2.2 Kw Booster P/N 112729 (Tested with fire)

Note Overall flue system length for optimum performance should be between 3600-4800 long, vertical and have no bends. Flue pipes should be  $\varnothing 150\text{mm}$  ( $\varnothing 6"$ ) Deviation from this may alter heaters performance. If in doubt contact your Jayline supplier. Stainless steel deflector tested on this unit.

A provision has been made at the rear of the pedestal for seismic restraint by bolting through the two holes provided

Hearth specs (NZ) minimum Ash Hearth only e.g ceramic tiles glued to a heat sensitive floor. Hearth specs (Australia) minimum Ash Hearth only e.g 13mm non combustible fire board.