
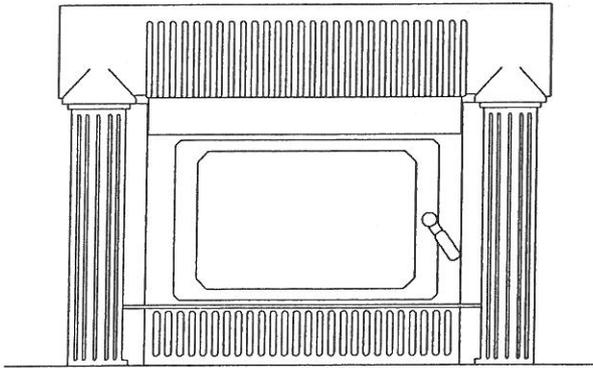
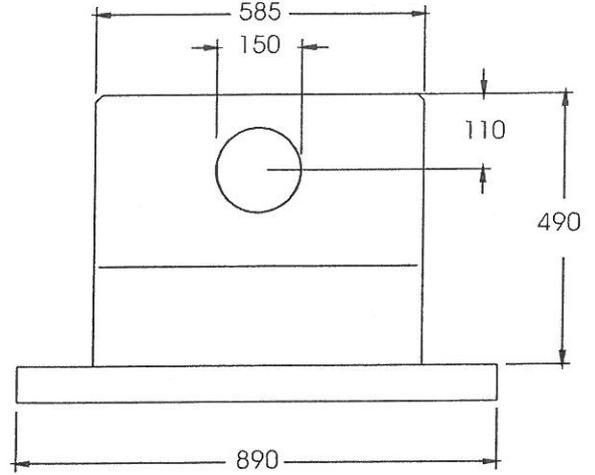


# TROJAN CLEAN AIR

## INSERT SPECIFICATIONS

MODEL: INSERT IB06

PAGE 1 OF 2

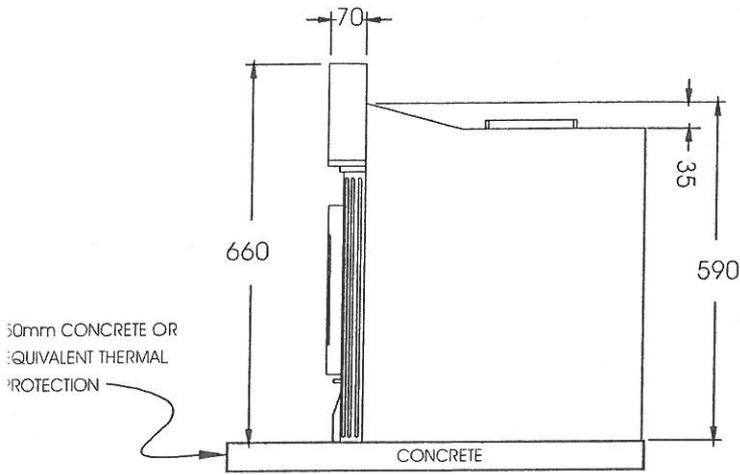

Industry Rated Peak Output (KW)	Max Log Length	Water Heating Option	Estimated Burn Time on low (HRS)
17	425	✓	8-10


### TESTED AND APPROVED TO THE FOLLOWING STANDARDS

NZS 7401: 1985 - NZS 7403: 1993

### INSERT SPECIFICATIONS

PAGE 2 OF 2

Typical installation shown complies with AS2918 and NZS7421 (including appendix J). The insulating blanket supplied should be installed with all units to ensure maximum performance.

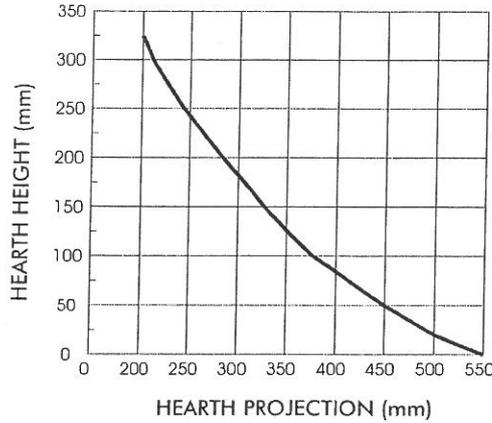

**New Zealand**  
As per graph (Insulating Hearth)  
Dimensions are taken from door seal lip (Fire Box) to the front of the hearth.

**Australia**  
Minimum hearth from masonry opening 870mm wide extending 300 from door lip and using material as per AS2918:1990


**Notes:**

**Flue Kits (All Models)**

Please follow the flue manufacturers installation instructions. The tested flue height for this unit is 4.2 metres. Deviation from this may alter the heaters performance and may nullify the Reliance Group warranty if the flue is excessively long or short. If in doubt contact your Fisher supplier.

**(Seismic Restraint)**

Drill through the bottom tray of the cabinet into the masonry and fit two M6 bolts or similar  $\varnothing$  as a seismic restraint.

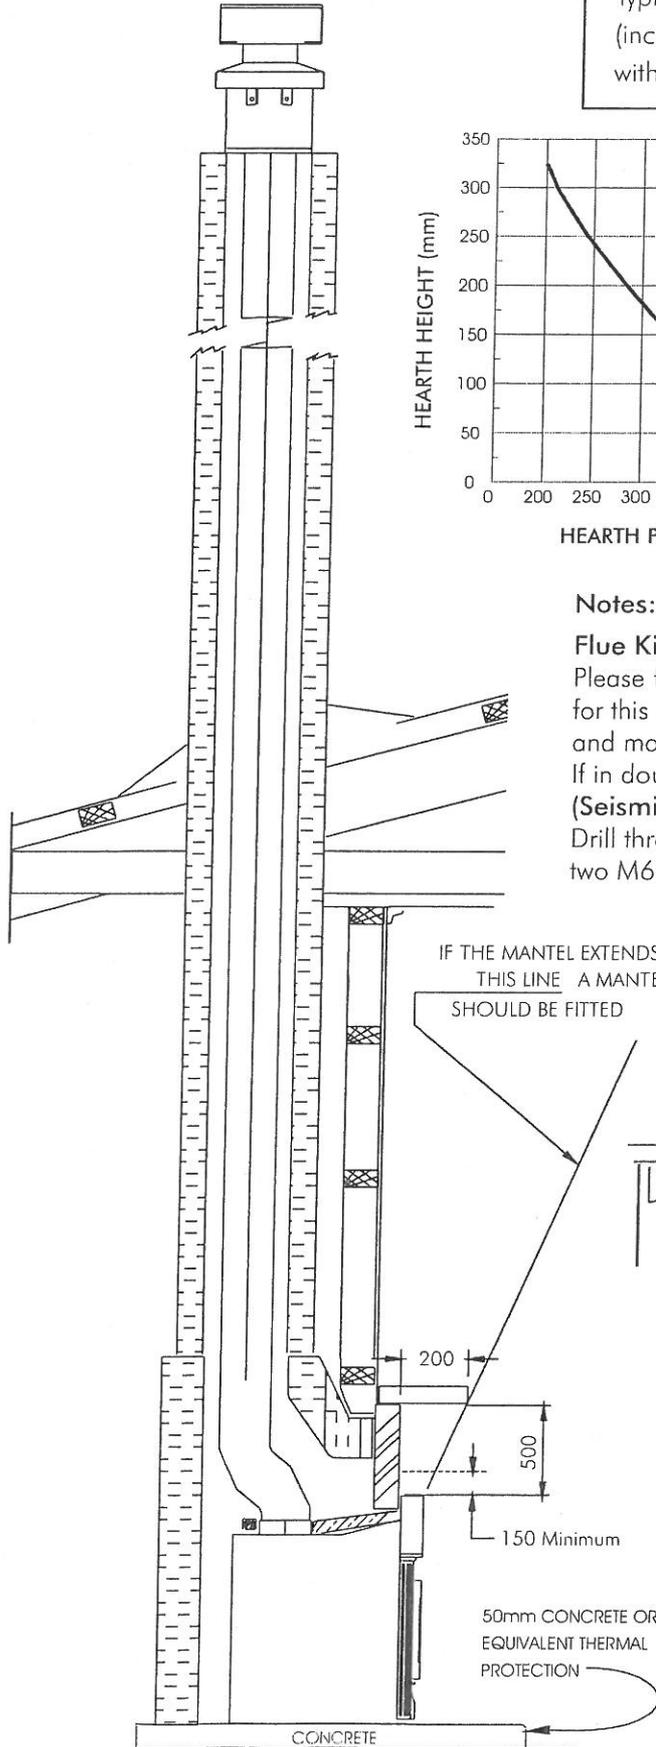

**Water Booster**  
We recommend the use of the "Superior" 2.2 Kw Booster P/N 112687 (Tested)

